

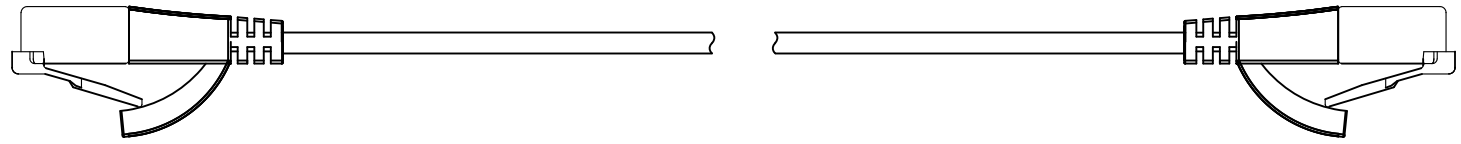


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
AO	INITIAL RELEASE	KEN	22.7.16

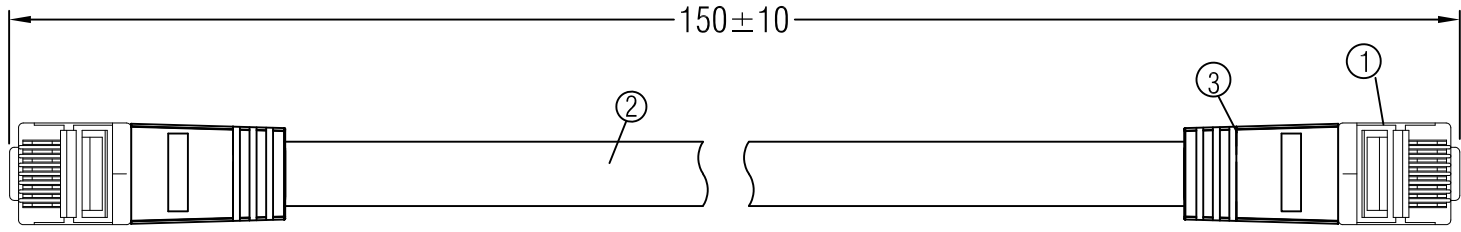

CONTACT

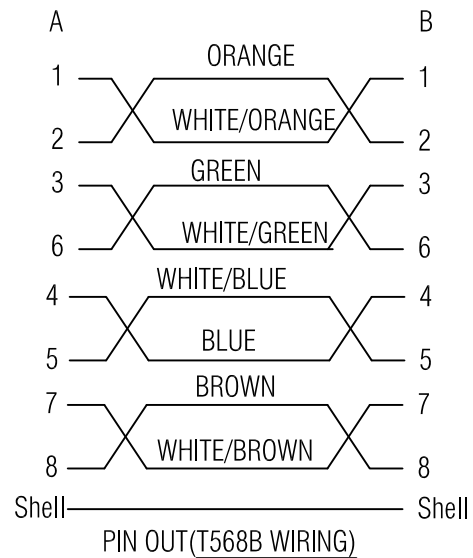

SPECIFICATION

MATERIAL:

- 1. Modular Plug: 8P8CS(Gold-plated shell) Shot Body PC
- 2. Cable: (7/0.08B+150D*1P+AL)*3C+(7/0.08B+150D*1P+7/0.08B+150D+AL)*1C OD:2.4*7.4MM PVC Black
- 3. Molding: PVC 45P BLACK

ELECTRICAL:

- 1. Open, Short, Miswire 100% test;
- 2. Insulation resistance: 10MΩmin/DC 500V;
- 3. Contact resistance: 5Ωmax;

ENVIRONMENTAL:

- 1. Operation temperature: -10°C~+60°C;
- 2. Storage temperature: -10°C~+40°C
relative humidity <80%.

<i>UNLESS OTHERWISE SPECIFIED TOLERANCES</i>		Coorle Technology	
<i>DECIMALS:</i>	<i>ANGLES:</i>	<i>TITLE</i>	CAT. 7 F/FTP LAN Cable L=150MM
X :±0.20	X :±3°	<i>DWN</i>	Michael 22.07.16 PART-NO:
X.X :±0.10	X.X :±1°	<i>CHKD</i>	UNIT: mm
X.XX :±0.05		<i>APVD</i>	SHEET:1 OF 1 SCALE:1/1
ENGINEERING COPY			