
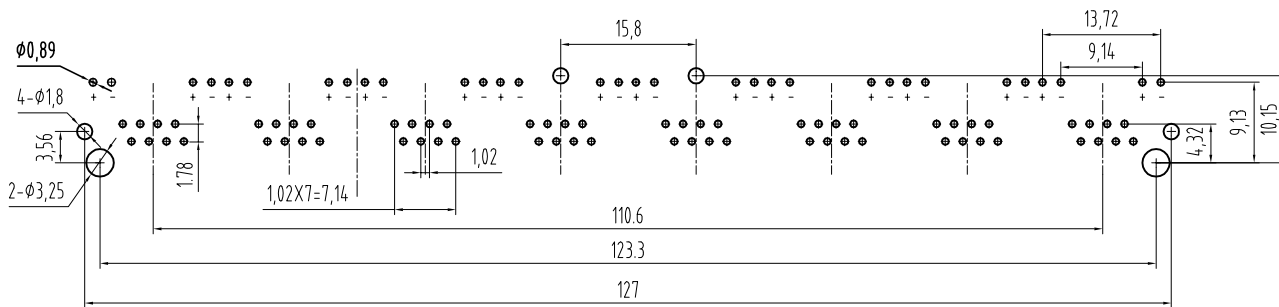
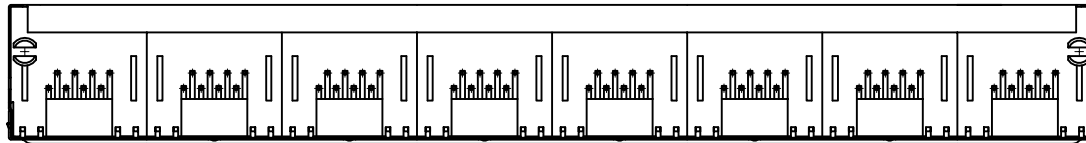



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

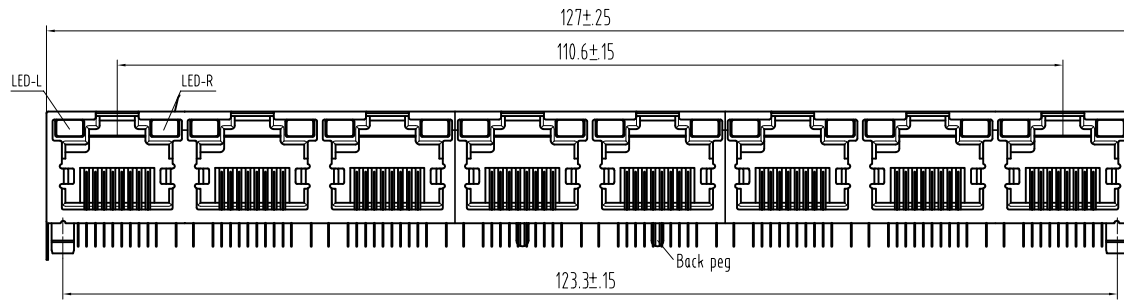

PC Board Layout
Component Side Shown

MECHANICAL:

- 1. DURRABILITY :750 CYCLES MIN.
- 2.PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

- 1. STORAGE : -40℃~+85℃
- 2. OPERATION : 0? TO 70?

NOTES:

MATERIAL :

- 1.HOUSING MATERIAL :GLASS FILLED POLYESTER UL94V-0.
- 2.CONTACT MATERIAL :PHOSPHOR BRONZE φ0.46mm.
- 3.PLATING :GOLD PLATING OVER NICKEL.
- 4.SHIELD :0.23mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.
- 5.LED :OPTION

ELECTRICAL:

- 1.VOLTAGE RATING :125 VAC RMS.
- 2.CURRENT RATING :1.5 AMP.
- 3.CONTACT RESISTANCE :30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.

DIMENSIONAL TOLERANCES MM (INCH) TOLERANCES EXCEPT AS NOTED .125 ± 0.15 .00 ± 0.075 .000 ± 0.05 ANGLES ± 0.5 THRO ANGLE PROJECTION	DFTD SHB CHKD LANBO MFD APPVL	DATE 2007.05.05 DATE 2007.05.05 DATE DATE	TITLE <h2 style="text-align: center;">56LED 8P8CS 1*8</h2> DRAWING NO. TE5JA1003 /PART NO. DO NOT SCALE DRAWING	SIZE A3 REV 0
	MATERIAL :			
	Q.T'Y :			
	FINISH :			
SCALE :		SHEET X OF Y		

