
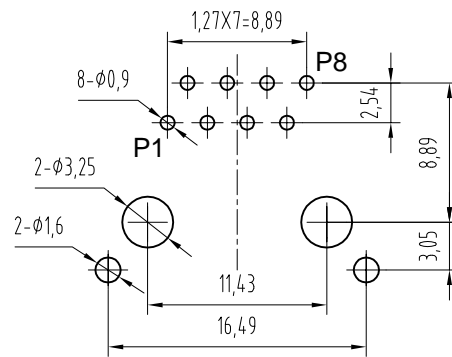
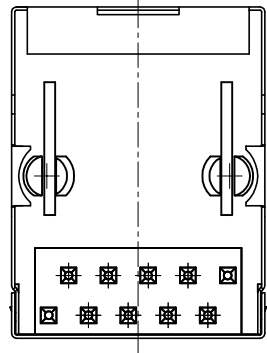
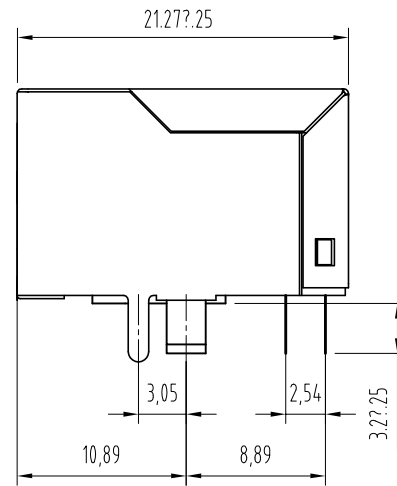


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

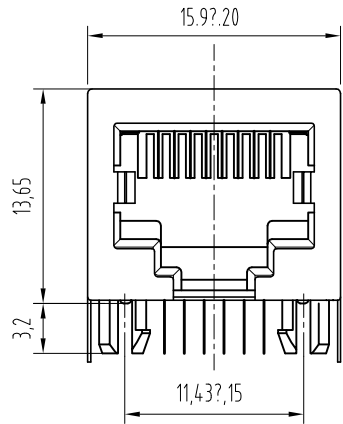

PC Board Layout  
Component Side Shown

NOTES:

MATERIAL :

- |                     |   |
|---------------------|---|
| 1. HOUSING MATERIAL | : GLASS FILLED POLYESTER UL94V-0.                 |
| 2. CONTACT MATERIAL | : PHOSPHOR BRONZE $\phi 0.45\text{mm}$ .          |
| 3. PLATING          | : GOLD PLATING OVER NICKEL.                       |
| 4. SHIELD           | : 0.20mm THICKNESS IRON ALLOY WITH NICKEL PLATED. |

ELECTRICAL:

- |                                       |                               |
|---------------------------------------|-------------------------------|
| 1. VOLTAGE RATING                     | : 125 VAC RMS.                |
| 2. CURRENT RATING                     | : 1.5 AMP.                    |
| 3. CONTACT RESISTANCE                 | : 30 MILLIOHMS MAX.           |
| 4. INSULATION RESISTANCE              | : 500 MEGOHMS MIN @ 500V DC . |
| 5. DIELECTRIC WITHSTANDING RESISTANCE | : 1000V AC RMS 50Hz. 1MIN.    |

MECHANICAL:

- |                             |                   |
|-----------------------------|-------------------|
| 1. DURRABILITY              | : 750 CYCLES MIN. |
| 2. PCB RETENTION PRE-SOLDER | : 1 LB MIN.       |

ENVIRONMENTAL:

- |              |               |
|--------------|---------------|
| 1. STORAGE   | : -40°C~+85°C |
| 2. OPERATION | : 0? TO 70?.  |

DEFIAND LIST	MM INCH		DFTO: SHB	DATE: 2007.05.03	<b>Coorle 库乐科技</b>	
	TOLERANCES EXCEPT AS NOTED		CHKD: LANBO	DATE: 2007.05.03		
	MM		MFO:	DATE:	TITLE 59A 10P8C JACK W/ SHIELD	
	.01 ± 0.15		APPVL:	DATE:		
	.00 ± 0.075		MATERIAL :		DRAWING NO. TES9A1006	
.000 ± 0.05		QTY :		SIZE		
ANGLES ± 0.5		FINISH :		/PART NO. A3 0		
THIRD ANGLE PROJECTION		SCALE :				DO NOT SCALE DRAWING
				SHEET X OF Y		