


RoHS compliant

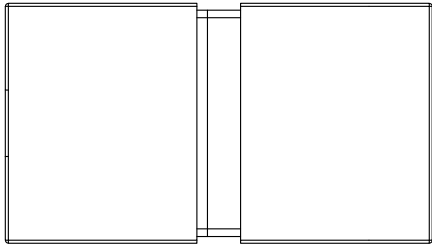

NOTES

MATERIAL





- 1.HOUSING : PBT UL94V-0
- 2.CONTACT : PHOSPHOR BRONZE T=0.35mm.
- 3.PLATING : CONTACT AREA-SELECTIVE GOLD PLATING OVER NICKEL.
- 4.SHIELD : STAINLESS STEEL

ELECTRICAL

- 1.VOLTAGE RATING : 125 VAC RMS.
- 2.CURRENT RATING : 1.5 AMP.
- 3.CONTACT RESISTANCE : 40 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC RESISTANCE : 1000V AC RMS 50Hz. 1MIN.
- 6.DURRABILITY : 750 CYCLES MIN.

ENVIRONMENTAL:

- 1.STORAGE : -40℃~+85℃.
- 2.OPERATION : -20℃~+75℃.

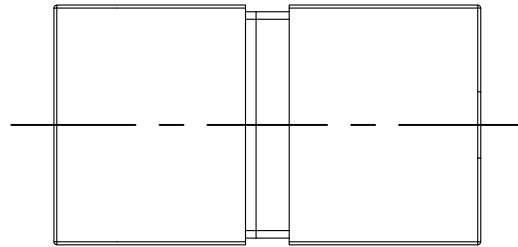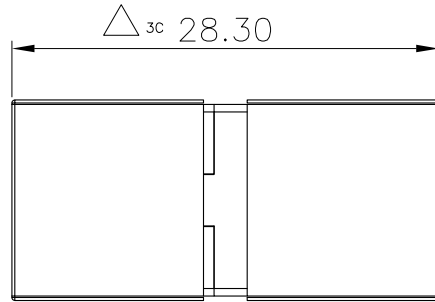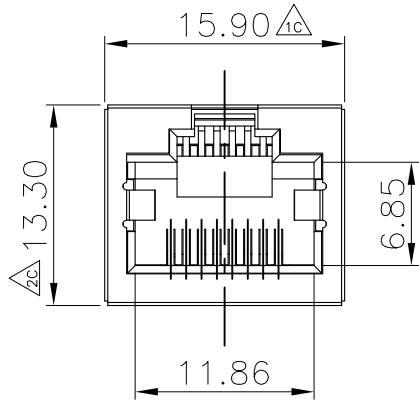

GENERAL TOLERANCE

.X	±0.35	X.°	± 2°
.XX	±0.25	.X°	± 1°
.XXX	±0.15	.XX°	± 0.5°

DRAWN

CHECKE

APPROVE

DRAWING NO

UNIT

SCALE

SHEET

REV

MM

1:1

1 OF 1

A0

Coorle Technology

PART NO.

102140001

TITLE

RJ45屏蔽直通模块 无椭圆孔
四面全包

