

NOTES:

MATERIAL :

- | | |
|--------------------|--|
| 1.HOUSING MATERIAL | :GLASS FILLED POLYESTER UL94V-0. |
| 2.CONTACT MATERIAL | :PHOSPHOR BRONZE ϕ 0,46mm. |
| 3.PLATING | :GOLD PLATING OVER NICKEL. |
| 4.SHIELD | :0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED. |
| 5.LED | :OPTION |

ELECTRICAL:



- | | |
|--------------------------------------|------------------------------|
| 1.VOLTAGE RATING | :125 VAC RMS. |
| 2.CURRENT RATING | :1.5 AMP. |
| 3.CONTACT RESISTANCE | :30 MILLIOHMS MAX. |
| 4.INSULATION RESISTANCE | :500 MEGOHMS MIN @ 500V DC . |
| 5.DIELECTRIC WITHSTANDING RESISTANCE | :1000V AC RMS 50Hz. 1MIN. |

MECHANICAL:

- | | |
|----------------------------|------------------|
| 1.DURRABILITY | :750 CYCLES MIN. |
| 2.PCB RETENTION PRE-SOLDER | :1 LB MIN. |

ENVIRONMENTAL:

- | | |
|--------------|----------------|
| 1. STORAGE | : -40°C~+85°C |
| 2. OPERATION | : 0°C TO 70°C. |

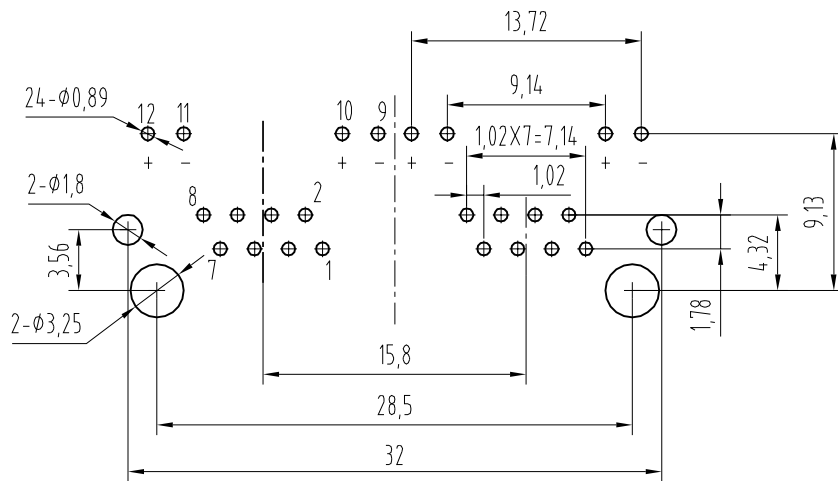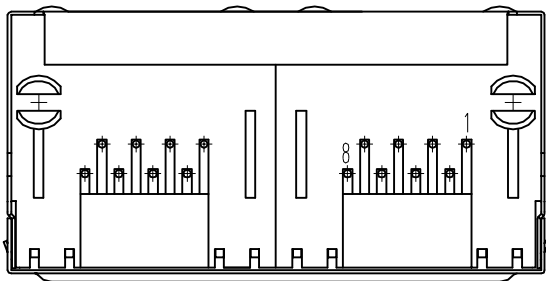

PC Board Layout
Component Side Shown

<p>MM INCH</p>		DFTD SHB	DATE 2008.03.05	<h1>Coorle 库乐科技</h1>
<p>TOLERANCES EXCEPT AS NOTED</p>		CHKD LANBO	DATE 2008.03.05	
<p>MM .1 ± 0.15 .10 ± 0.175 .11 ± 0.15</p>		MFD	DATE	<p>TITLE 56LED 8P8CS 1*2</p>
<p>ANGLES ± 0.5</p>		APPVL	DATE	
<p>THIRD ANGLE PROJECTION</p>		MATERIAL :		<p>DRAWING NO. TESJA1006</p> <p>/PART NO.</p>
		QTY :		
		FINISH :		<p>DO NOT SCALE DRAWING</p>
		SCALE :		