

RoHS&REACH

A

B

C





D

A


B

C

D

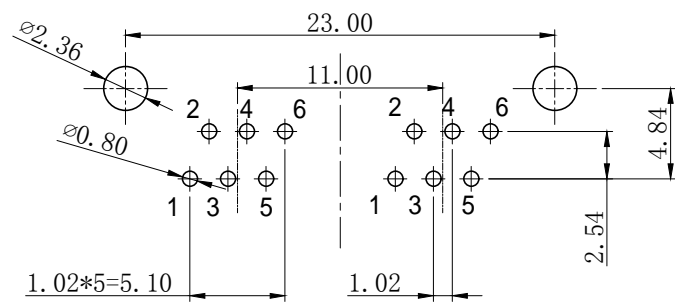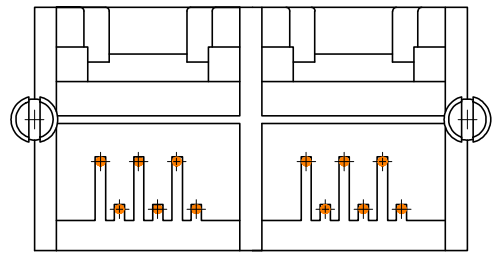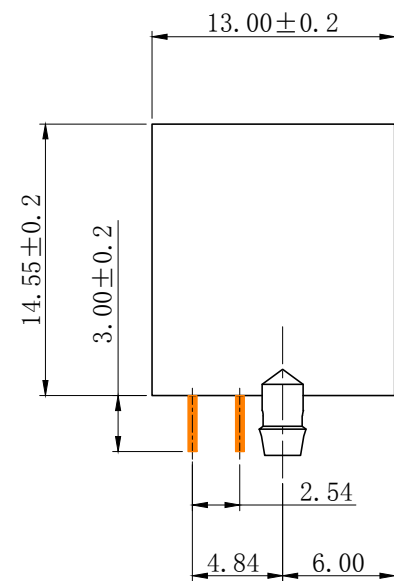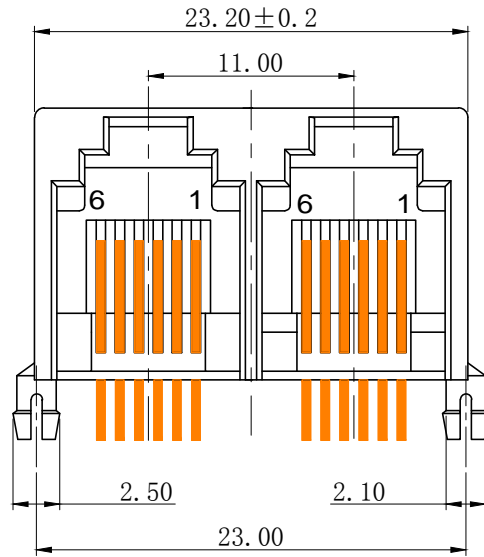

PC Board Layout  
Component Side Shown

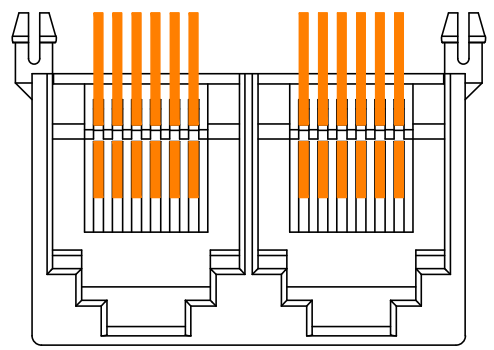

材料Material:

- 1. 外壳材质: PBT, PA66, PA46 (UL 94V-0)  
Housing Material: PBT, PA66, PA46 (UL 94V-0)
- 2. 触点材料: 圆针直径0.46mm磷青铜; 镀镍后镀金  
Contact Material: Round Pins-0.46mm Diameter  
Phosphor Bronze;  
Gold Plating Over Nickel

电气Electrical

- 1. 额定电压: 交流125伏  
Voltage Rating : 125 VAC Rms
- 2. 额定电流: 1.5安培  
Current Rating: 1.5 AMP
- 3. 接触电阻: 最大30毫欧  
Contact Resistance: 30 Milliohms MaX
- 4. 绝缘电阻: 直流500V下, 绝缘最小500兆欧  
Insulation Resistance: 500 megohms min @500V DC
- 5. 绝缘耐压: 交流60Hz 1000V下, 1分钟  
Dielectric Withstanding  
Resistance: 1000V AC Rms 60Hz. 1Min
- 6. 耐久: 插拔750次以上  
Durability: 750 Cycles Min
- 7. 工作温度: -40℃~+85℃  
Operation Temperature: -40℃~+85℃

未注公差		设计	X.C.S	比例	1:1
尺寸标注	公差	审核	批准	单位	mm
	长度			图幅	A4
.X.	±0.25	角法	图数	版本	A-2
.X	±0.20			产品型号	
.XX	±0.15	角法	图数	产品编号	
.XXX	±0.10			第1页 共1页	图纸编号

Coorle Technology 库乐科技

1

2

3

4

5

6