

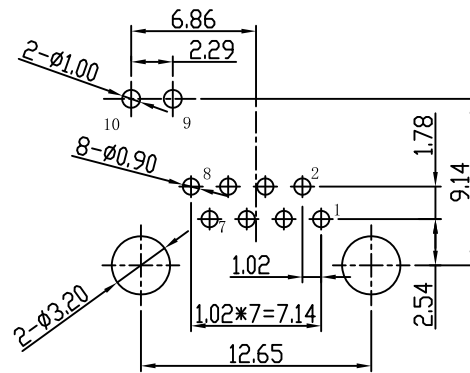
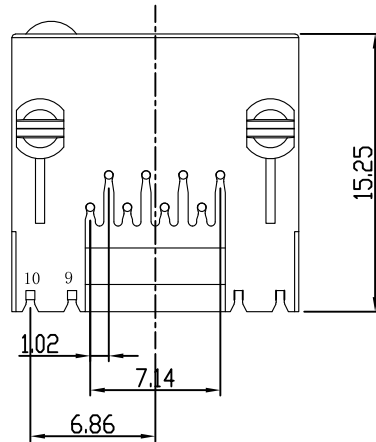
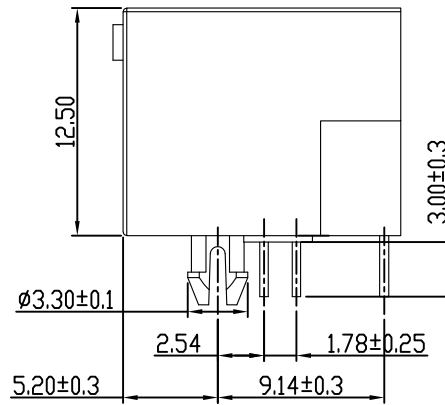


REV.	ECN.NO.	NAME	DATA
A0	NEW	Michael	2021-01-12

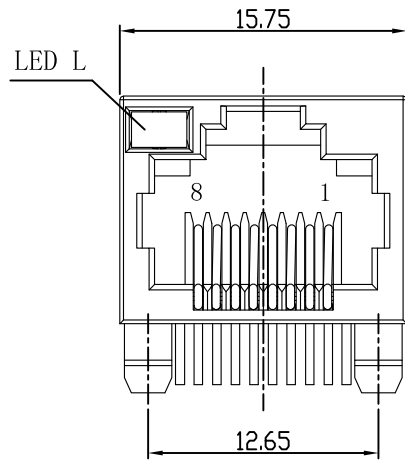

Recommend PCB Layout
(Jack Top View)
TOLERANCES: ±0.05



SPECIFICATION NOTES:

ELECTRICAL:

- VOLTAGE RATING: 125 VAC RMS
- CURRENT RATING: 1.5 AMP
- CONTACT RESISTANCE: 30mΩ MAX.
- INSULATION RESISTANCE: 500MΩMIN. AT 500V DC.
- DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE

MECHANICAL:

- HOUSING MATERIAL: SEE PART NUMBER.
- CONTACTS: φ0.46mm PHOSPHOR BRONZE, GOLD PLATING OVER NICKEL
- OPERATING LIFE: 750 CYCLES MIN.
- MATING FORCE: 30N MAX.
UNMATING FORCE: 30N MAX.

ENVIRONMENTAL:

- STORAGE: -40°C TO +85°C
- OPERATION: -40°C TO +85°C

MM (INCH)		绘图 (Designed) Michael		Coorle Technology	
公差 TOLERANCES		审核 (Checked)		系列 (SERIES)	名称 (NAME)
MM	MM	批准 (Approved)		RJ	56 8P8C 全塑 左带灯右无灯
.0 ± 0.20	.0 ± 0.38	材料 (Material) SEE NOTES		图号 (DWG NO.):	
.00 ± 0.15	.00 ± 0.25	角度 (ANGLES) ± 1.5°		料号 (PART NO): N/A	
.000 ± 0.075	.000 ± 0.15	比例 (SCALE) 1:1		版本 REV.	A0
DETAILED LISTS		第三视图		单位 (UNIT): MM 共 (SHEET) 1 页 第 (OF) 1 页	