


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
AO	INITIAL RELEASE	KEN	19.09.08

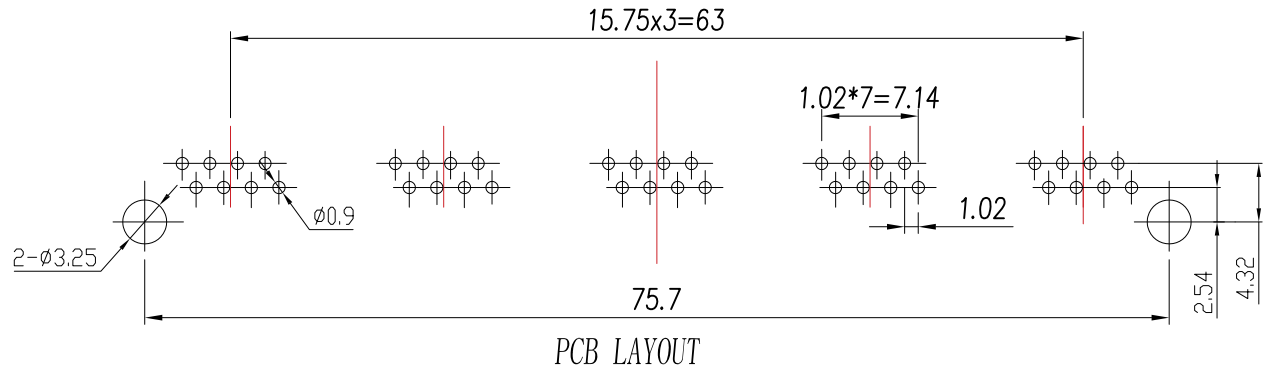

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 50Hz or 60Hz, 1MIN.

MECHANICAL:




- HOUSING & INSERT MATERIAL : PBT UL94V-0.
- CONTACT MATERIAL : DIAMETER 0.45MM PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
- MATING/UNMATING FORCE : 2.2KG.F MAX.
- RETENTION STRENGTH : 7.7KG.F MIN BETWEEN JACK AND PLUG.
- OPERATING LIFE : 600 CYCLES MIN.

ENVIRONMENTAL:

- STORAGE : 10°C ~ +40°C RELATIVE HUMIDITY<70%.
- OPERATION : -40°C ~ +70°C.

Remark:

- Tolerances Unless Otherwise Specified
 .0±0.25 .00±0.20 .000±0.10
- The mark with ★ is the key inspection dimension for QC

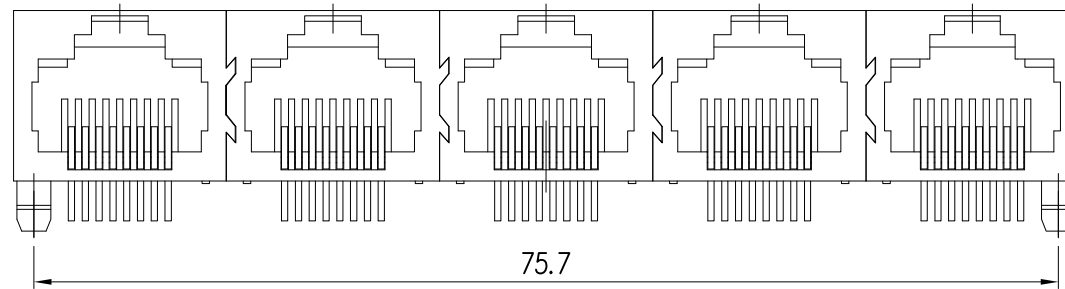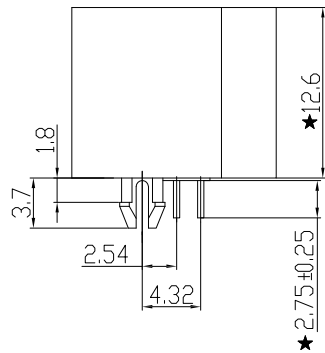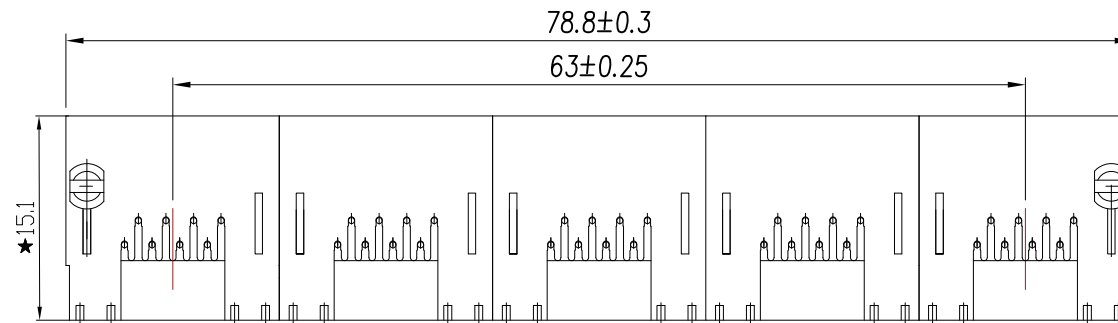

UNLESS OTHERWISE SPECIFIED TOLERANCES		Coorle 库乐科技	
DECIMALS:	ANGLES:	TITLE	56LED 1x5
X :±0.20	X :±3°	DWN	Michael 19.09.08
X.X :±0.10	X.X :±1°	CHKD	
X.XX :±0.05		APVD	
		PART-NO:	
		UNIT:	mm
		SHEET:	1 OF 1
		SCALE:	1/1
ENGINEERING COPY			