

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

NOTES:

ELECTRICAL:

- 1.VOLTAGE RATING :125 VAC RMS.
- 2.CURRENT RATING :1.5 AMP.
- 3.CONTACT RESISTANCE :30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC STRENGTH :1000V AC RMS 50Hz. 1MIN.



MECHANICAL:

- 1.HOUSING MATERIAL :GLASS FILLED POLYESTER UL94V-0.
- 2.CONTACT MATERIAL :PHOSPHOR BRONZE T=0.35mm FLAT PIN
- 3.PLATING :GOLD PLATING OVER NICKEL.
- 4.OPERATING :750 CYCLES MIN.
- 5.PCB RETENTION PRE-SOLDER :1 LB MIN.



ENVIRONMENTAL:

- 1.Temperature Range : -40°C~+85°C
- 2.Relative Humidity : 90~95% (40±2°C)

PART NUMBER:

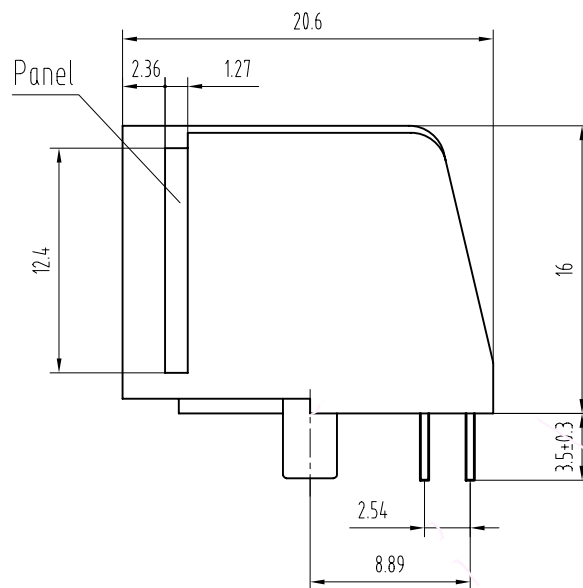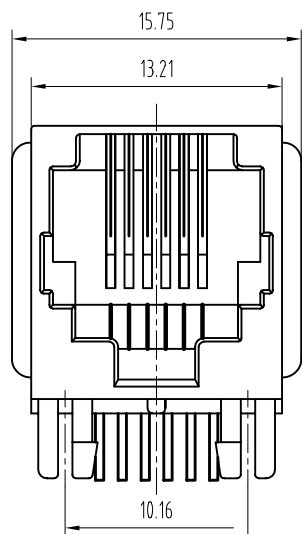

PCB LAYOUT

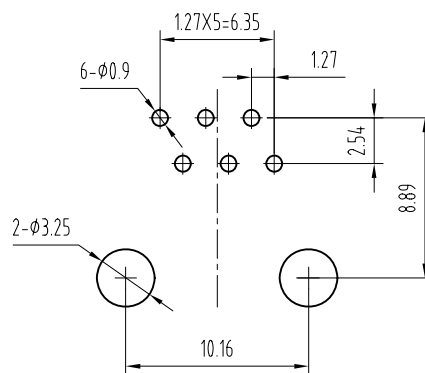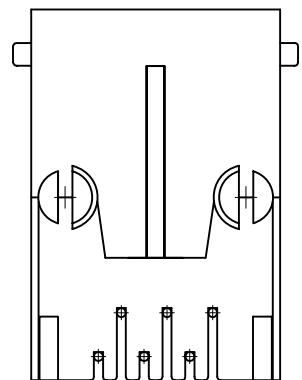

DETAILS			DFTO XNW	DATE 08.7.1	<h1 style="margin: 0;">Coorle Technology</h1>	
	TOLERANCES EXCEPT AS NOTED		CHKD BETTY	DATE 08.7.1		
	MM		APPL PAUL	DATE 08.7.1	<p>TITLE</p> <p style="text-align: center;">6P6C SIDE ENTRY JACK WITHN PANEL</p>	
	.5 ± 0.20	*	MATERIAL :			
.00 ± 0.15	*	QTY :		<p>/PART NO.</p> <p style="text-align: right;">SIZE A4 REV A/0</p>		
.000 ± 0.075	*	FINISH :				
ANGLES ±		SCALE : 1:1		<p>DO NOT SCALE DRAWING</p> <p style="text-align: right;">SHEET 1 OF 1</p>		
<p>THIRD ANGLE PROJECTION</p>						