
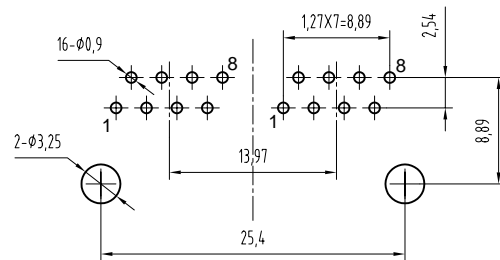
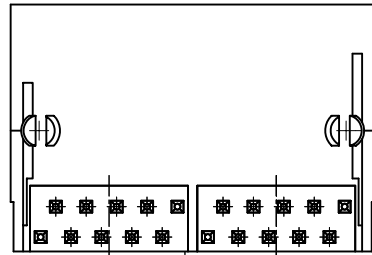



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

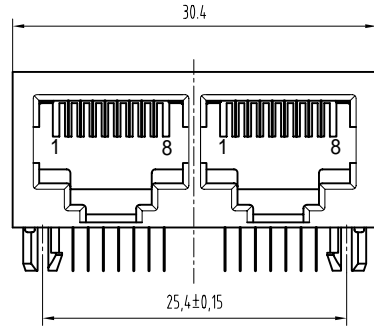

PC Board Layout
Component Side Shown

NOTES:

MATERIAL:

- 1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
- 2. CONTACT MATERIAL : PHOSPHOR BRONZE ϕ 0.46mm.
- 3. PLATING : GOLD PLATING OVER NICKEL.

ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC RMS.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500V DC .
- 5. DIELECTRIC WITHSTANDING RESISTANCE : 1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

- 1. DURRABILITY : 750 CYCLES MIN.
- 2. PCB RETENTION PRE-SOLDER : 1 LB MIN.

ENVIRONMENTAL:

- 1. STORAGE : -40°C ~ +85°C
- 2. OPERATION : 0°C TO 70°C.

DETAILED LISTS	MM (INCH)		DFTD: SHD	DATE: 2007.05.03	<h1>Coorle Technology</h1>	
	TOLERANCES EXCEPT AS NOTED		CHKD: LANBO	DATE: 2007.05.03		
	MM		APPLV:	DATE:	<h2>TITLE</h2> 5921 1x2 JACK W/O SHIELD	
	.5 ± 0.15	±				
.00 ± 0.075	±	MATERIAL :		DRAWING NO. TES9A1008		
.000 ± 0.05	±					SIZE A3
ANGLES ± 0.5		QTY :		DO NOT SCALE DRAWING		
THIRD ANGLE PROJECTION		FINISH :				SHEET X