



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

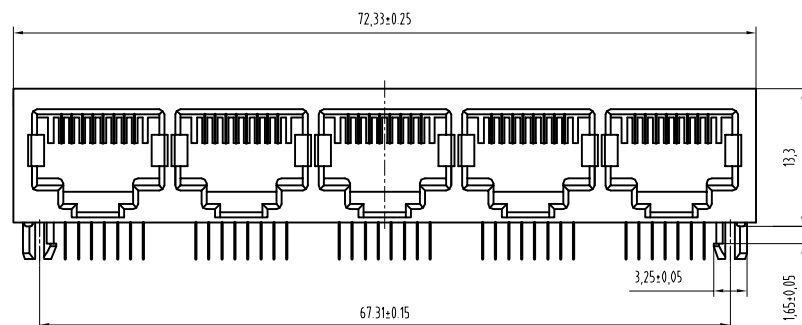

NOTES:

MATERIAL :

- 1.HOUSING MATERIAL :GLASS FILLED POLYESTER UL94V-0.
- 2.CONTACT MATERIAL :PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
- 3.PLATING :GOLD PLATING OVER NICKEL.

ELECTRICAL:



- 1.VOLTAGE RATING :125 VAC RMS.
- 2.CURRENT RATING :1.5 AMP.
- 3.CONTACT RESISTANCE :30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC .
- 5.DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

- 1.DURRABILITY :750 CYCLES MIN.
- 2.PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C~+85°C
2. OPERATION : 0°C TO 70°C.

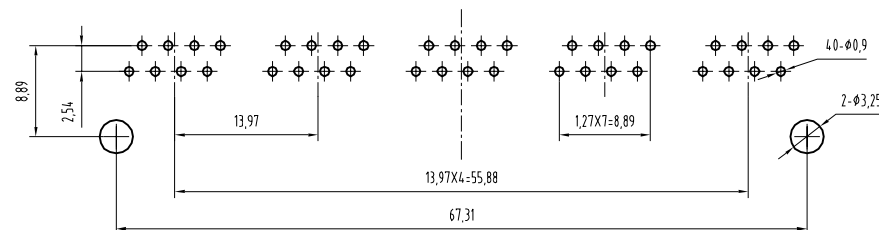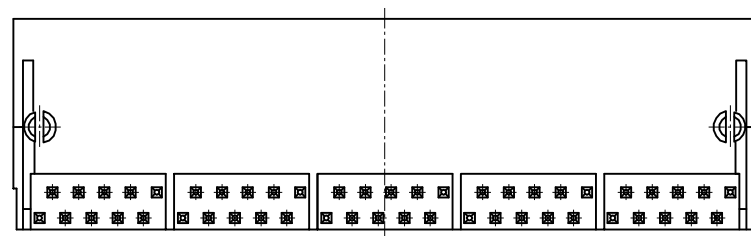

PC Board Layout
Component Side Shown

MM INCH TOLERANCES EXCEPT AS NOTED MM .1 ± 0.15 .01 ± 0.075 .01 ± 0.15 ANGLES ± 0.5 THIRD ANGLE PROJECTION	DFTO: SHB CHKD: LAMBO MFO: APPVL:	DATE: 2007.05.03 DATE: 2007.05.03 DATE: DATE:	Coorle Technology 59 1x5 JACK W/O SHIELD	
	MATERIAL : QT'Y :	DATE:		
	FINISH : SCALE :	DATE:		
	DRAWING NO. TESSA1011 /PART NO.	SIZE A3 REV 0		
	DO NOT SCALE DRAWING SHEET X OF Y			