


SPECIFICATION NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 20mΩ MAX.
4. INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC.
5. DIELECTRIC STRENGTH: 1000 V AC OR 1500V DC RMS AT 0.5mA 50 Hz / 60 Hz FOR 1 MINUTE

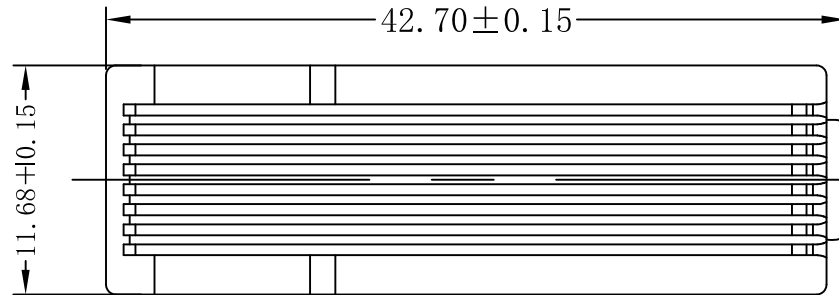

MECHANICAL:

1. HOUSING :PC
2. CONTACT MATERIAL:BRASS
3. PLATING:GOLD PLATING OVER NICKEL.
4. OPERATING LIFE:750 CYCLES MIN.
5. RETENTION STRENGTH:50N MIN. FOR 60S ± 5S


ENVIRONMENTAL:

1. STORAGE:-10° C TO +40° C RELATIVE HUMIDITY<80%, GB 10753-89
2. GUARANTEE PERIOD:12 MONTHS
3. OPERATION: -25°C~+55°C GB 10753-89

未注公差:

0-10= ± 0.05

≥ 10= ± 0.15



# Coorle Technolgy

TITLE	Modular Plug 8P8C Male to Male L=42.7				
PART NO				APPD	XHY
Customers Part NO				CHKD	XHY
SIZE	A4	REV	A/1	DRAW	XHY
UNIT	MM	SCALE	2:1	DWG NO	