


記號 MARK	ECN NO.	日期 DATE	修改 DRAW	核准 APPROVE

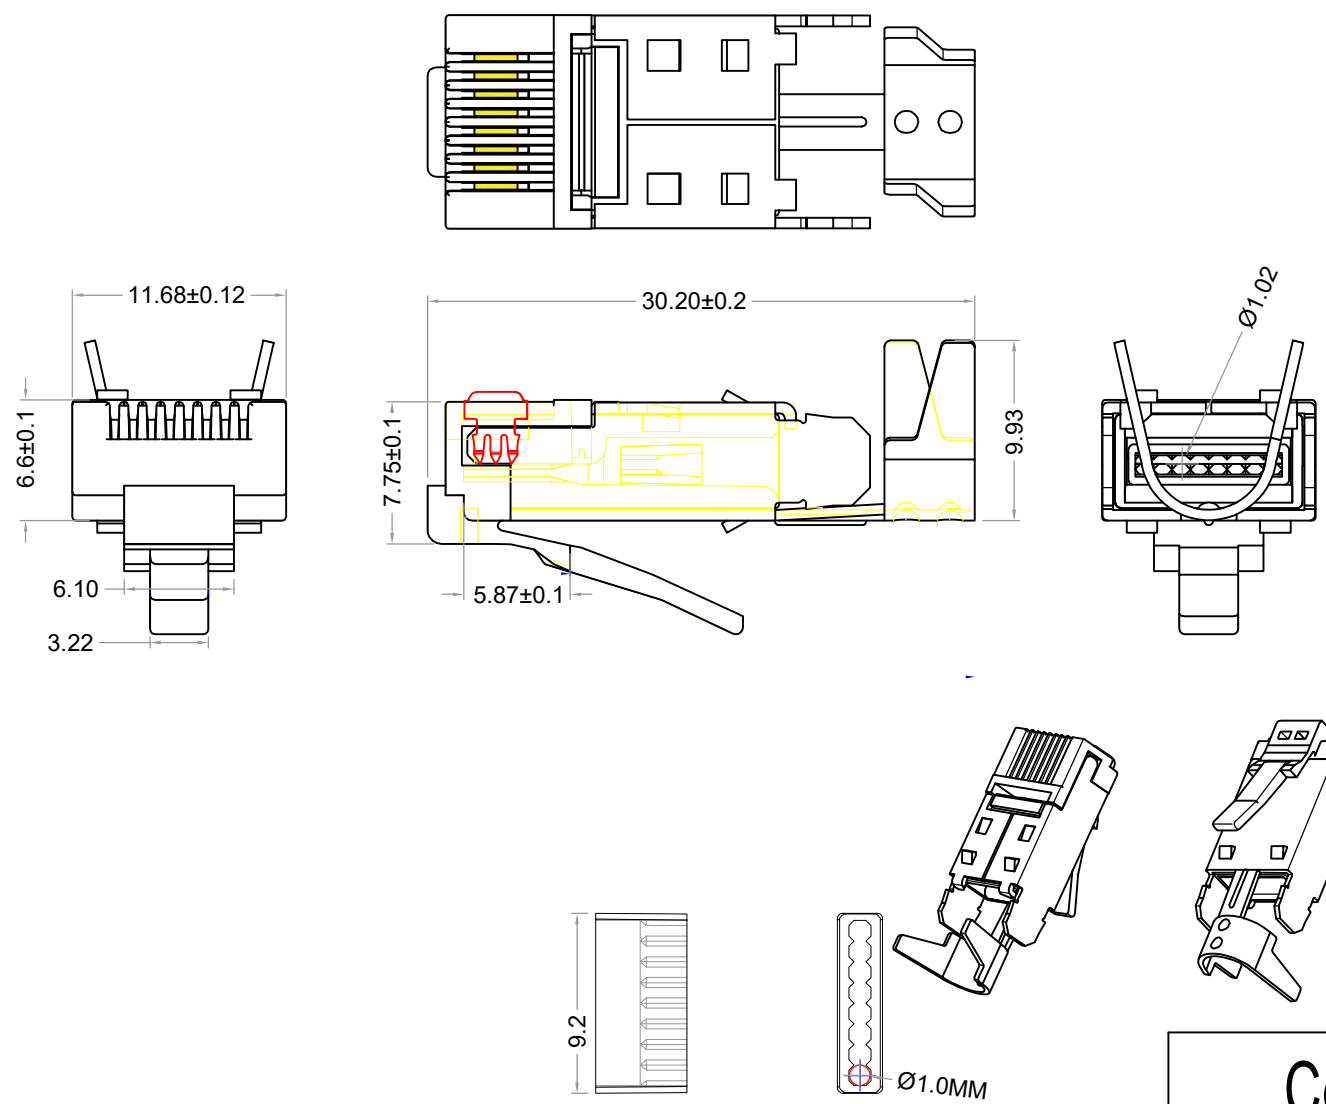

FEATURES:

- 1 Electrical Test:
 A. Safety Voltage/Current Rating 150V ac, at 1.5A.
 B. Dielectric with standing 1000V/DC/min, <0.5A.
 C. Insulation Resistance: >500MΩ, 1000V./min
 D. Contact Resistance: <20MΩ
- 2 Mechanical:
 A. Cable-to-Plug tensile strength-20LBs (89N) min.
 B. Durability: 750 mating cycles.
 3 Operation Temperature: -40°C ~ +85°C.
4. Environmental compliance
 A. the products are compliant with the RoHS, and REACH ETC.

特征:

- 1 電氣特性:
 A. 額定电压150伏特AC. 額定电流1.5A
 B. 耐電壓測試: 小于0.5安培1000伏特DC/一分鐘.
 C. 絕緣抗陰: 1000伏特DC/一分鐘, 大于500百萬歐姆
 D. 接觸陰坑: 不大于20mΩ (毫歐姆)
- 2 機械特性:
 A. 拉力測試-電纜至插座張力強度至少一分鐘20磅 (89N)
 B. 耐力測試-拔插測試750次以上.
 3 使用溫度範圍: -40°C ~ +85°C
 4 環保符合性:
 A. 產品符合RoHS, REACH等環保規格.

BLADE:	202	304	309	311	314	319	320
Drawing							
Mark							●

<input checked="" type="checkbox"/> 屏蔽壳 Shell	<input checked="" type="checkbox"/> 黄铜 Brass	<input type="checkbox"/> 铁 Spcc
Au: <input type="checkbox"/> G/F" <input type="checkbox"/> 1u" <input type="checkbox"/> 3u" <input checked="" type="checkbox"/> Ni <input checked="" type="checkbox"/> 80u"		
胶壳 PC(聚碳酸酯) <input type="checkbox"/> 94-V0 <input checked="" type="checkbox"/> 94-V2		
金片 (PIN针) Contacts	<input checked="" type="checkbox"/> 黄铜 Brass	<input type="checkbox"/> 磷铜 Phosphor copper
<input type="checkbox"/> G/F" <input type="checkbox"/> 1u" <input type="checkbox"/> 3u" <input type="checkbox"/> 6u"		
<input checked="" type="checkbox"/> 15u" <input type="checkbox"/> 30u" <input type="checkbox"/> 50u" <input type="checkbox"/> OTHER		

品名规格 DESCRIPTION		8P8C 德式水晶头 铜壳镀镍0.6T		页次 SHEET	1/1
产品编号 PRODUCT NO		单位 UNIT	mm	比例 SCALE	1:1
DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		第三视角法 THIRD ANGLE PROJECTION		日期 DATE	2022/5/20
x.xx ±0.2	ANGLES	制图 DRAWN		日期 DATE	2022/5/20
x.xx ±0.10	X.±0°	核对 CHECK		日期 DATE	2022/5/20
x.xxx ±0.050	X.±0.0°	批准 APPRO		日期 DATE	2022/5/20

Coorle Technology