
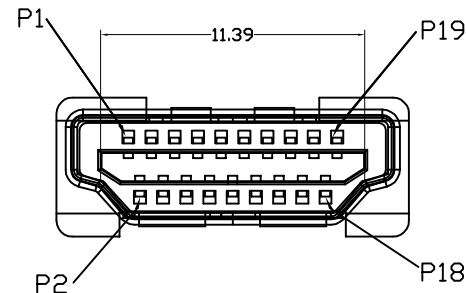


REV.	ZONE	DESCRIPTION	DESIGN	DATE
A		初版发行	Jack	09. 05. 05






DNOTES:
SPECIFICATION:
CONTACT CURRENT RATING:0.5 AMPERES.
DIELECTRIC WITHSTANDING VOLTAGE:AC 300V R.MS.
INSULATION RESISTANCE:100M Ω MIN.
CONTACT RESISTANCE:30m Ω MAX.
ENMRONMENTAL:
OPERATING TEMPERATURE:-20° C - + 85° C.
MATERIAL:
INSULATOR:HI-TEMP PALSTIC UL 94V-0.
CONTACT:BRASS T=0.25mm.
SHELL:SPCC T=0.25mm.
PLATING:
Contact: Au Plated on contact area
Tin Plated on solder area
Nickel underplating over all
Shell: Nickel OR Au Plated

PIN NO	SINGAL NO	PIN NO	SINGAL NO
PIN 1	TMDS Data2+	PIN 2	TMDS Data2 Shield
PIN 3	TMDS Data2-	PIN 4	TMDS Data1+
PIN 5	TMDS Data1 Shield	PIN 6	TMDS Data1-
PIN 7	TMDS Data0+	PIN 8	TMDS Data0 Shield
PIN 9	TMDS Data0-	PIN 10	TMDS Clock+
PIN 11	TMDS Clock Shield	PIN 12	TMDS Clock-
PIN 13	CEC	PIN 14	Reserved(N.C)
PIN 15	SCL	PIN 16	SDA
PIN 17	DDC/CEC Ground	PIN 18	+5V Power
PIN 19	Hot Plug Detect		

Unless otherwise specified tolerances are		Coorle Technology				
X.X	±0.20	DRAW NO.	ZQ-09-0055	DATE	DRAW NAME:	
X.XX	±0.15					
X.XXX	±0.10	DWN	Jack	09. 05. 05	HDMI A TYPE 公头 20P 自动焊加锡	
X*	±2.0°	CHK			P/N :	
X.X*	±1.0°	APVD				
					UNIT	SCALE
					mm	1:1
					WEIGHT	REV
						A
					SHEET	1 OF 1

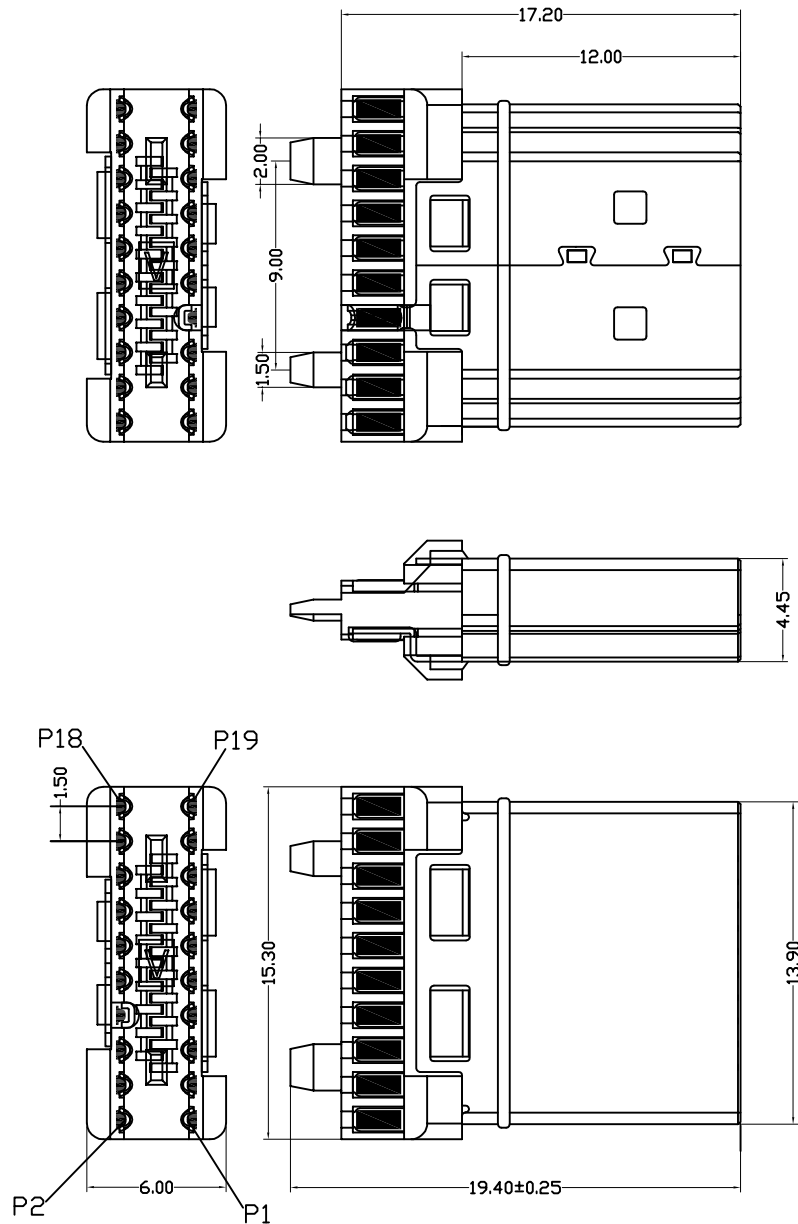


6	7	8	9
REV.	ZONE	DESCRIPTION	DESIGN DATE
A		初版发行	Jack 09. 05. 06

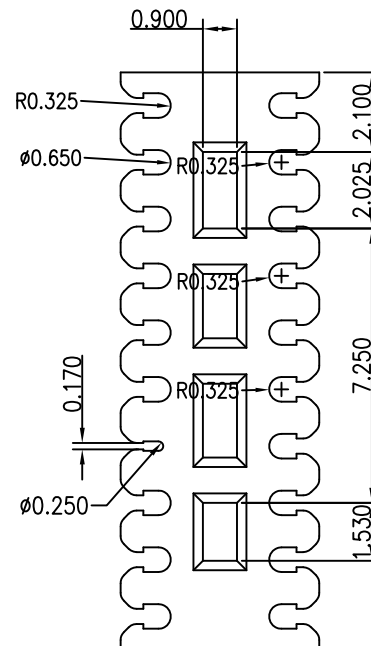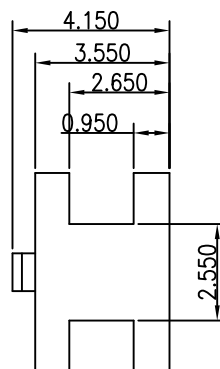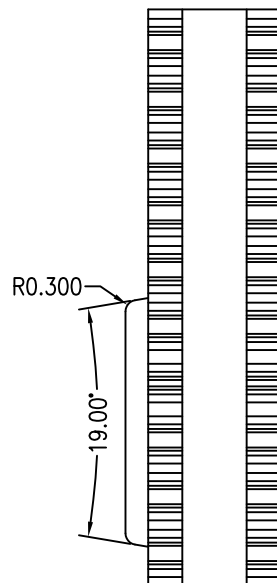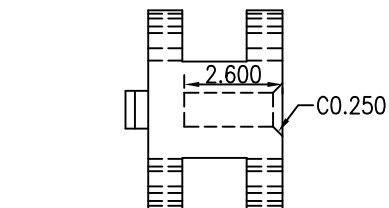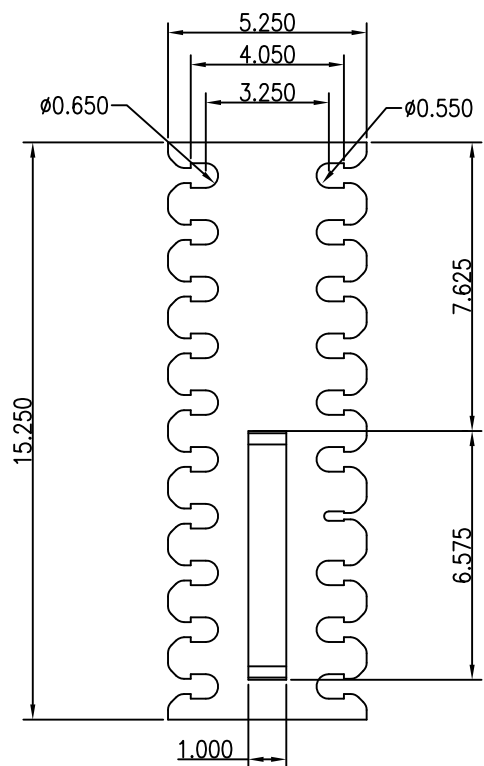

NOTES:

1. 材质:PA66+G/F10% ;
2. 功能尺寸位置,毛边最大允许0.02mm.
非功能尺寸外观毛边,最大允许0.04mm.
3. 塑胶表面不可有浮纤,缩水变形,缺胶,
4. 模穴号不可高于塑胶表面.
5. 为品管重点管控尺寸.

Unless otherwise specified tolerances are		Coorle Technology							
X.X	±0.20	DRAW NO.		DATE	DRAW NAME:	HDMI A 公 线夹32# 5034			
X.XX	±0.15								
X.XXX	±0.10								
X°	±2.0°								
X.X°	±1.0°								
		DWN	Jack	09. 05. 06	P/N :				
		CHK							
		APVD							
 Third Angle Project		FINISH			UNIT	SCALE	WEIGHT	REV	SHEET
		MATERIAL					mm	1:1	