


| | | | |
|------|-----------------------|---------|----------|
| REV. | ECN NO OR DESCRIPTION | REVISED | DATE |
| AO | INITIAL RELEASE | KEN | 23.04.27 |

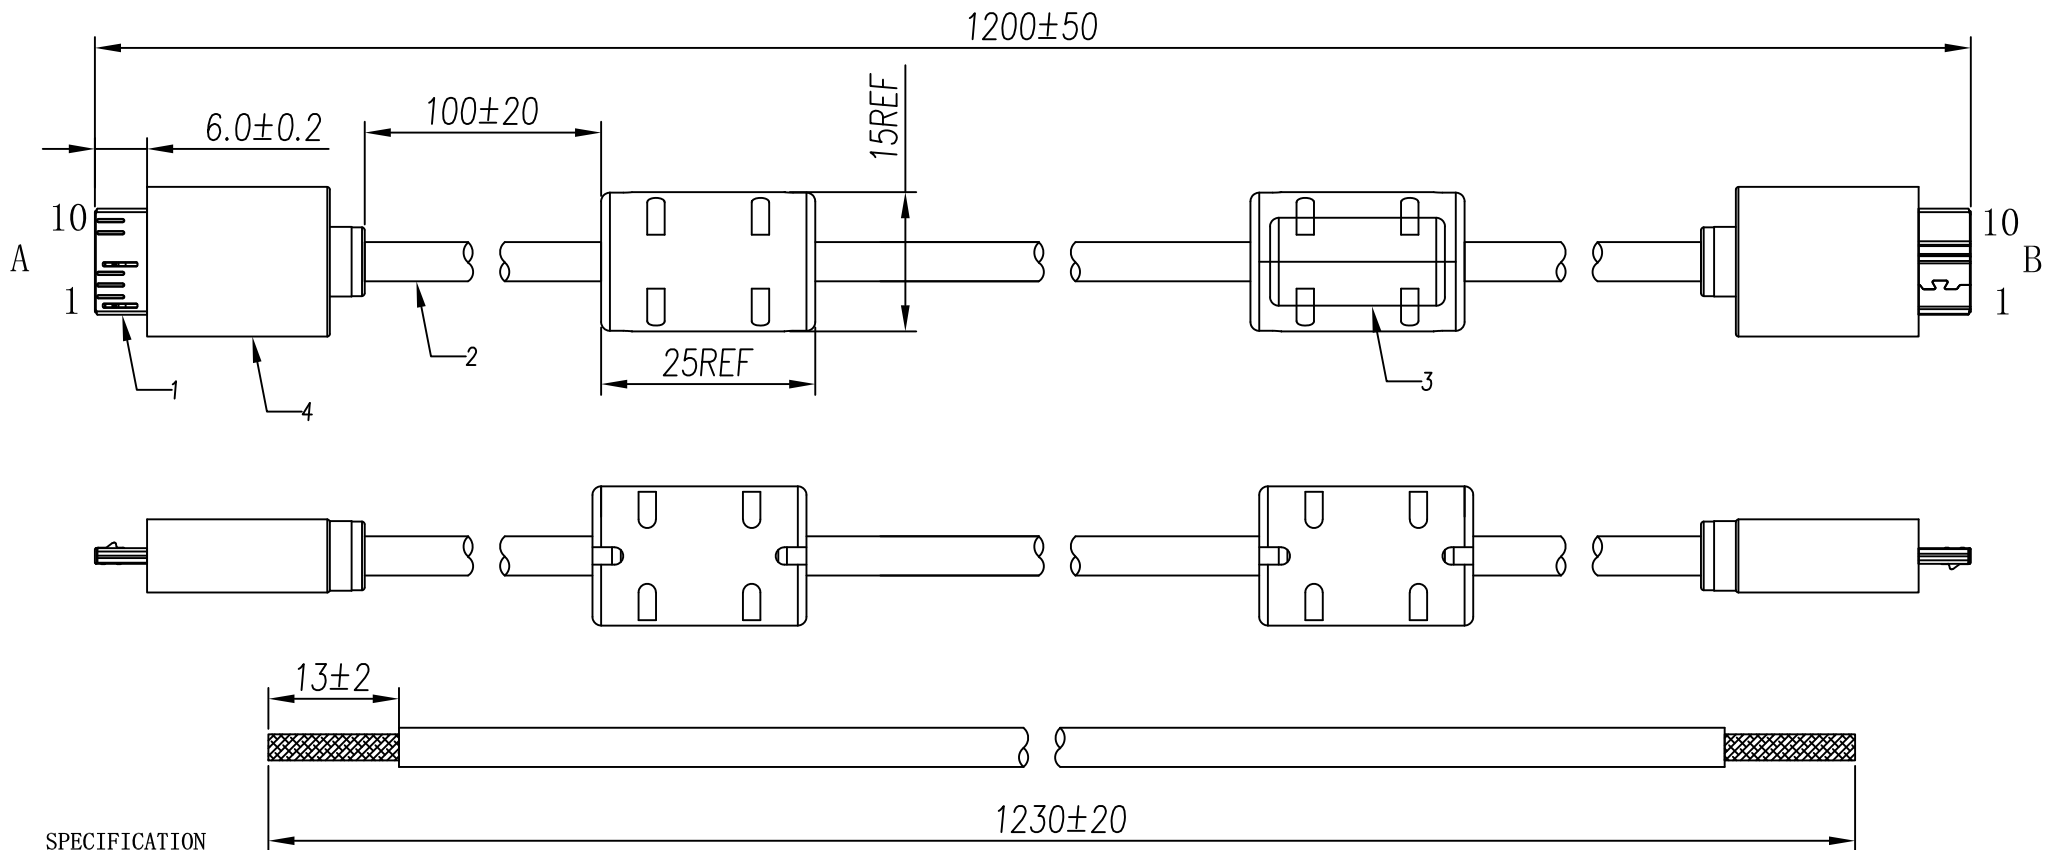

SPECIFICATION

MATERIAL:



- 1. Micro USB Male 3.0 10 PIN
- 2. Cable: [28AWG*1P+DA]*2C+30AWG*1P+24AWG*2C+AEB
TPE WHITE OD:4.5MM
- 3. Magnet ring: 10*20mm
- 4. Molding: TPE White

ELECTRICAL:

- 1. Open, Short, Miswire 100% test;
- 2. Insulation resistance: 10MΩ min/DC 500V;
- 3. Contact resistance: 5Ω max;
- 4. Cable TL Plug Tensile Strength: 7.7Kg Min;

ENVIRONMENTAL:

- 1. Operation temperature: -10°C~+60°C;
- 2. Storage temperature: -10°C~+40°C
relative humidity <80%.

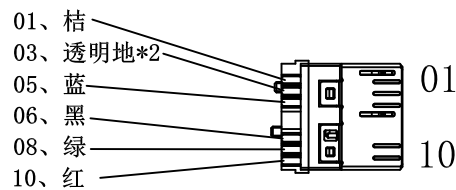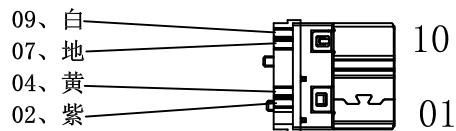

| | | | |
|---------------------------------------|----------|-------------------|---|
| UNLESS OTHERWISE SPECIFIED TOLERANCES | | Coorle Technology | |
| DECIMALS: | ANGLES: | TITLE | Cable Micro USB 3.0 MALE TO MALE L=1.2M |
| X :±0.20 | X :±3° | DWN | Michael 23.04.27 |
| X.X :±0.10 | X.X :±1° | CHKD | |
| X.XX :±0.05 | | APVD | |
| | | PART-NO: | |
| | | UNIT: | mm |
| | | SHEET: | 1 OF 1 |
| | | SCALE: | 1/1 |
| ENGINEERING COPY | | | |