




REV.	ECN NO OR DESCRIPTION	REVISED	DATE
AO	INITIAL RELEASE	KEN	23.06.07

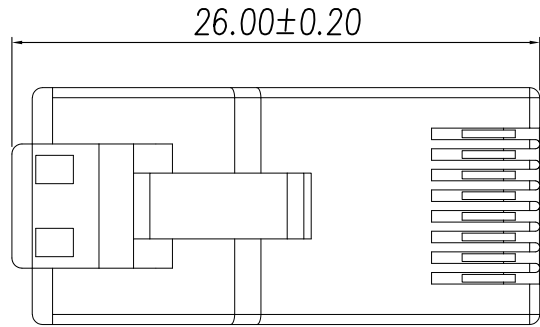


SPECIFICATION NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 20mΩ MAX.
4. INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC.
5. DIELECTRIC STRENGTH: 1000 V AC OR 1500V DC RMS AT 0.5mA 50 Hz / 60 Hz FOR 1 MINUTE

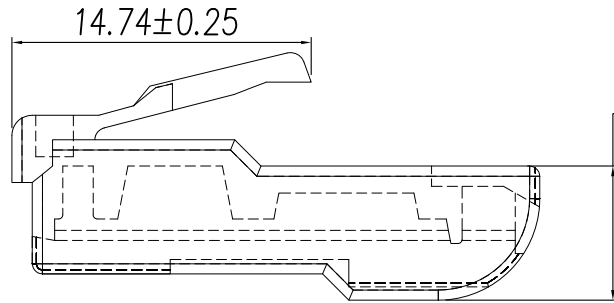

6.61±0.10

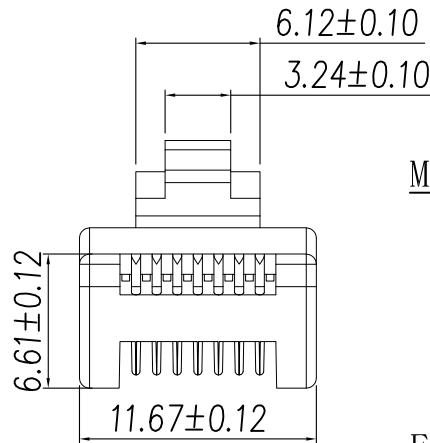


MECHANICAL:

1. HOUSING :PC
2. CONTACT MATERIAL:BRASS
3. PLATING:GOLD PLATING OVER NICKEL.
4. OPERATING LIFE:750 CYCLES MIN.
5. RETENTION STRENGTH:50N MIN. FOR 60S±5S

ENVIRONMENTAL:

1. STORAGE:-10° C TO +40° C RELATIVE HUMIDITY<80%, GB 10753-89
2. GUARANTEE PERIOD:12 MONTHS
3. OPERATION: -25°C~+55°C GB 10753-89

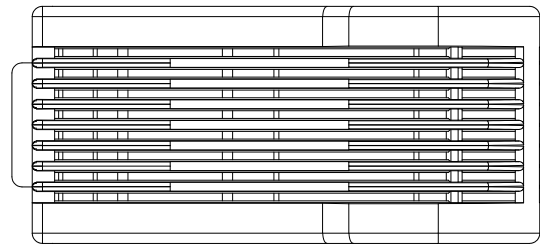

UNLESS OTHERWISE SPECIFIED TOLERANCES		Coorle 库乐科技	
DECIMALS:	ANGLES:	TITLE	MODULAR PLUG MALE TO MALE L=26MM R
X :±0.20	X :±3°	DWN	Michael 23.06.07 PART-NO:101030001
X.X :±0.10	X.X :±1°	CHKD	UNIT: mm
X.XX :±0.05		APVD	SHEET:1 OF 1
		SCALE:1/1	
ENGINEERING COPY			