


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
AO	INITIAL RELEASE	KEN	

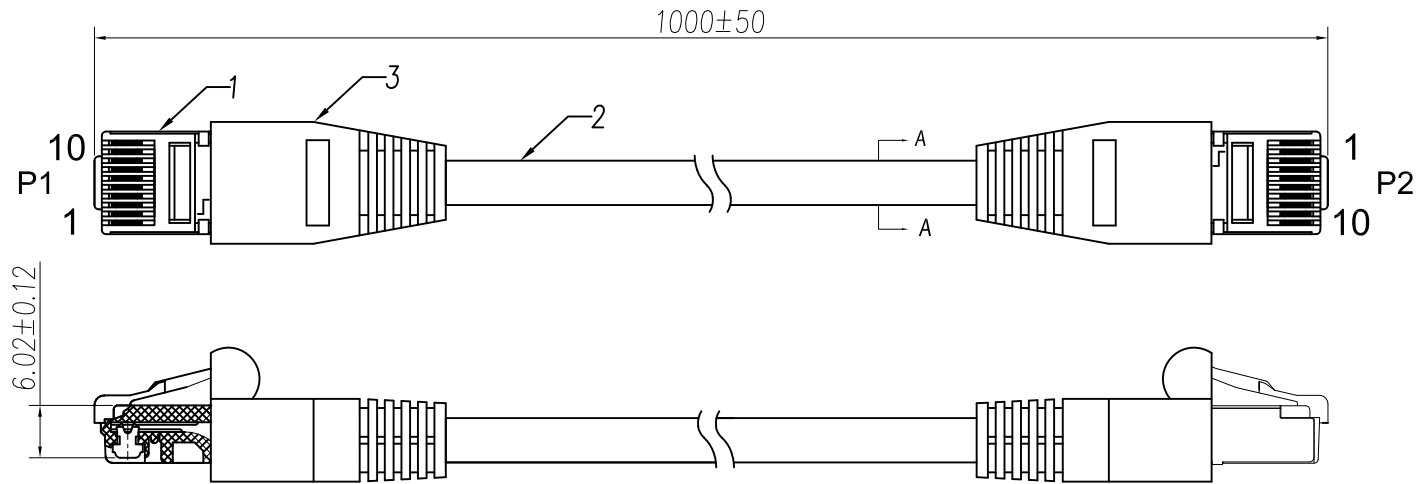

CONTACT		
P1	Color	P2
1	WHITE/ORANGE	1
2	ORANGE	2
3	WHITE/GREEN	3
4	BLUE	4
5	WHITE/BLUE	5
6	GREEN	6
7	WHITE/BROWN	7
8	BROWN	8
9	WHITE/BLACK	9
10	BLACK	10
11	GND	11

SPECIFICATION

MATERIAL:

- 1.Modular Plug: RJ50 10P10C Shield PC
- 2.Cable: CAT.5e STP 26AWG(7/0.16)*5P+MYLA+GND+AL
OD:6.0mm PVC Gray
- 3.Molding: PVC 45P Gray

ELECTRICAL:

- 1.Open, Short, Miswire 100% test;
- 2.Insulation resistance: 10MΩmin/DC 500V;
- 3.Contact resistance: 2Ωmax;
- 4.Cable TL Plug Tensile Strength:7.7Kg Min;

ENVIRONMENTAL:

- 1.Operation temperature: -10℃~+60℃;
- 2.Storage temperature: -10℃~+40℃
relative humidity <80%.

UNLESS OTHERWISE SPECIFIED TOLERANCES		Coorle Technology	
DECIMALS:	ANGLES:	TITLE	CAT. 5E STP RJ50 10P10C LAN Cable L=1M
X :±0.20	X :±3°	DWN	Michael 23.12.01 PART-NO:
X.X :±0.10	X.X :±1°	CHKD	UNIT: mm
X.XX :±0.05		APVD	SHEET:1 OF 1 SCALE:1/1
ENGINEERING COPY			