


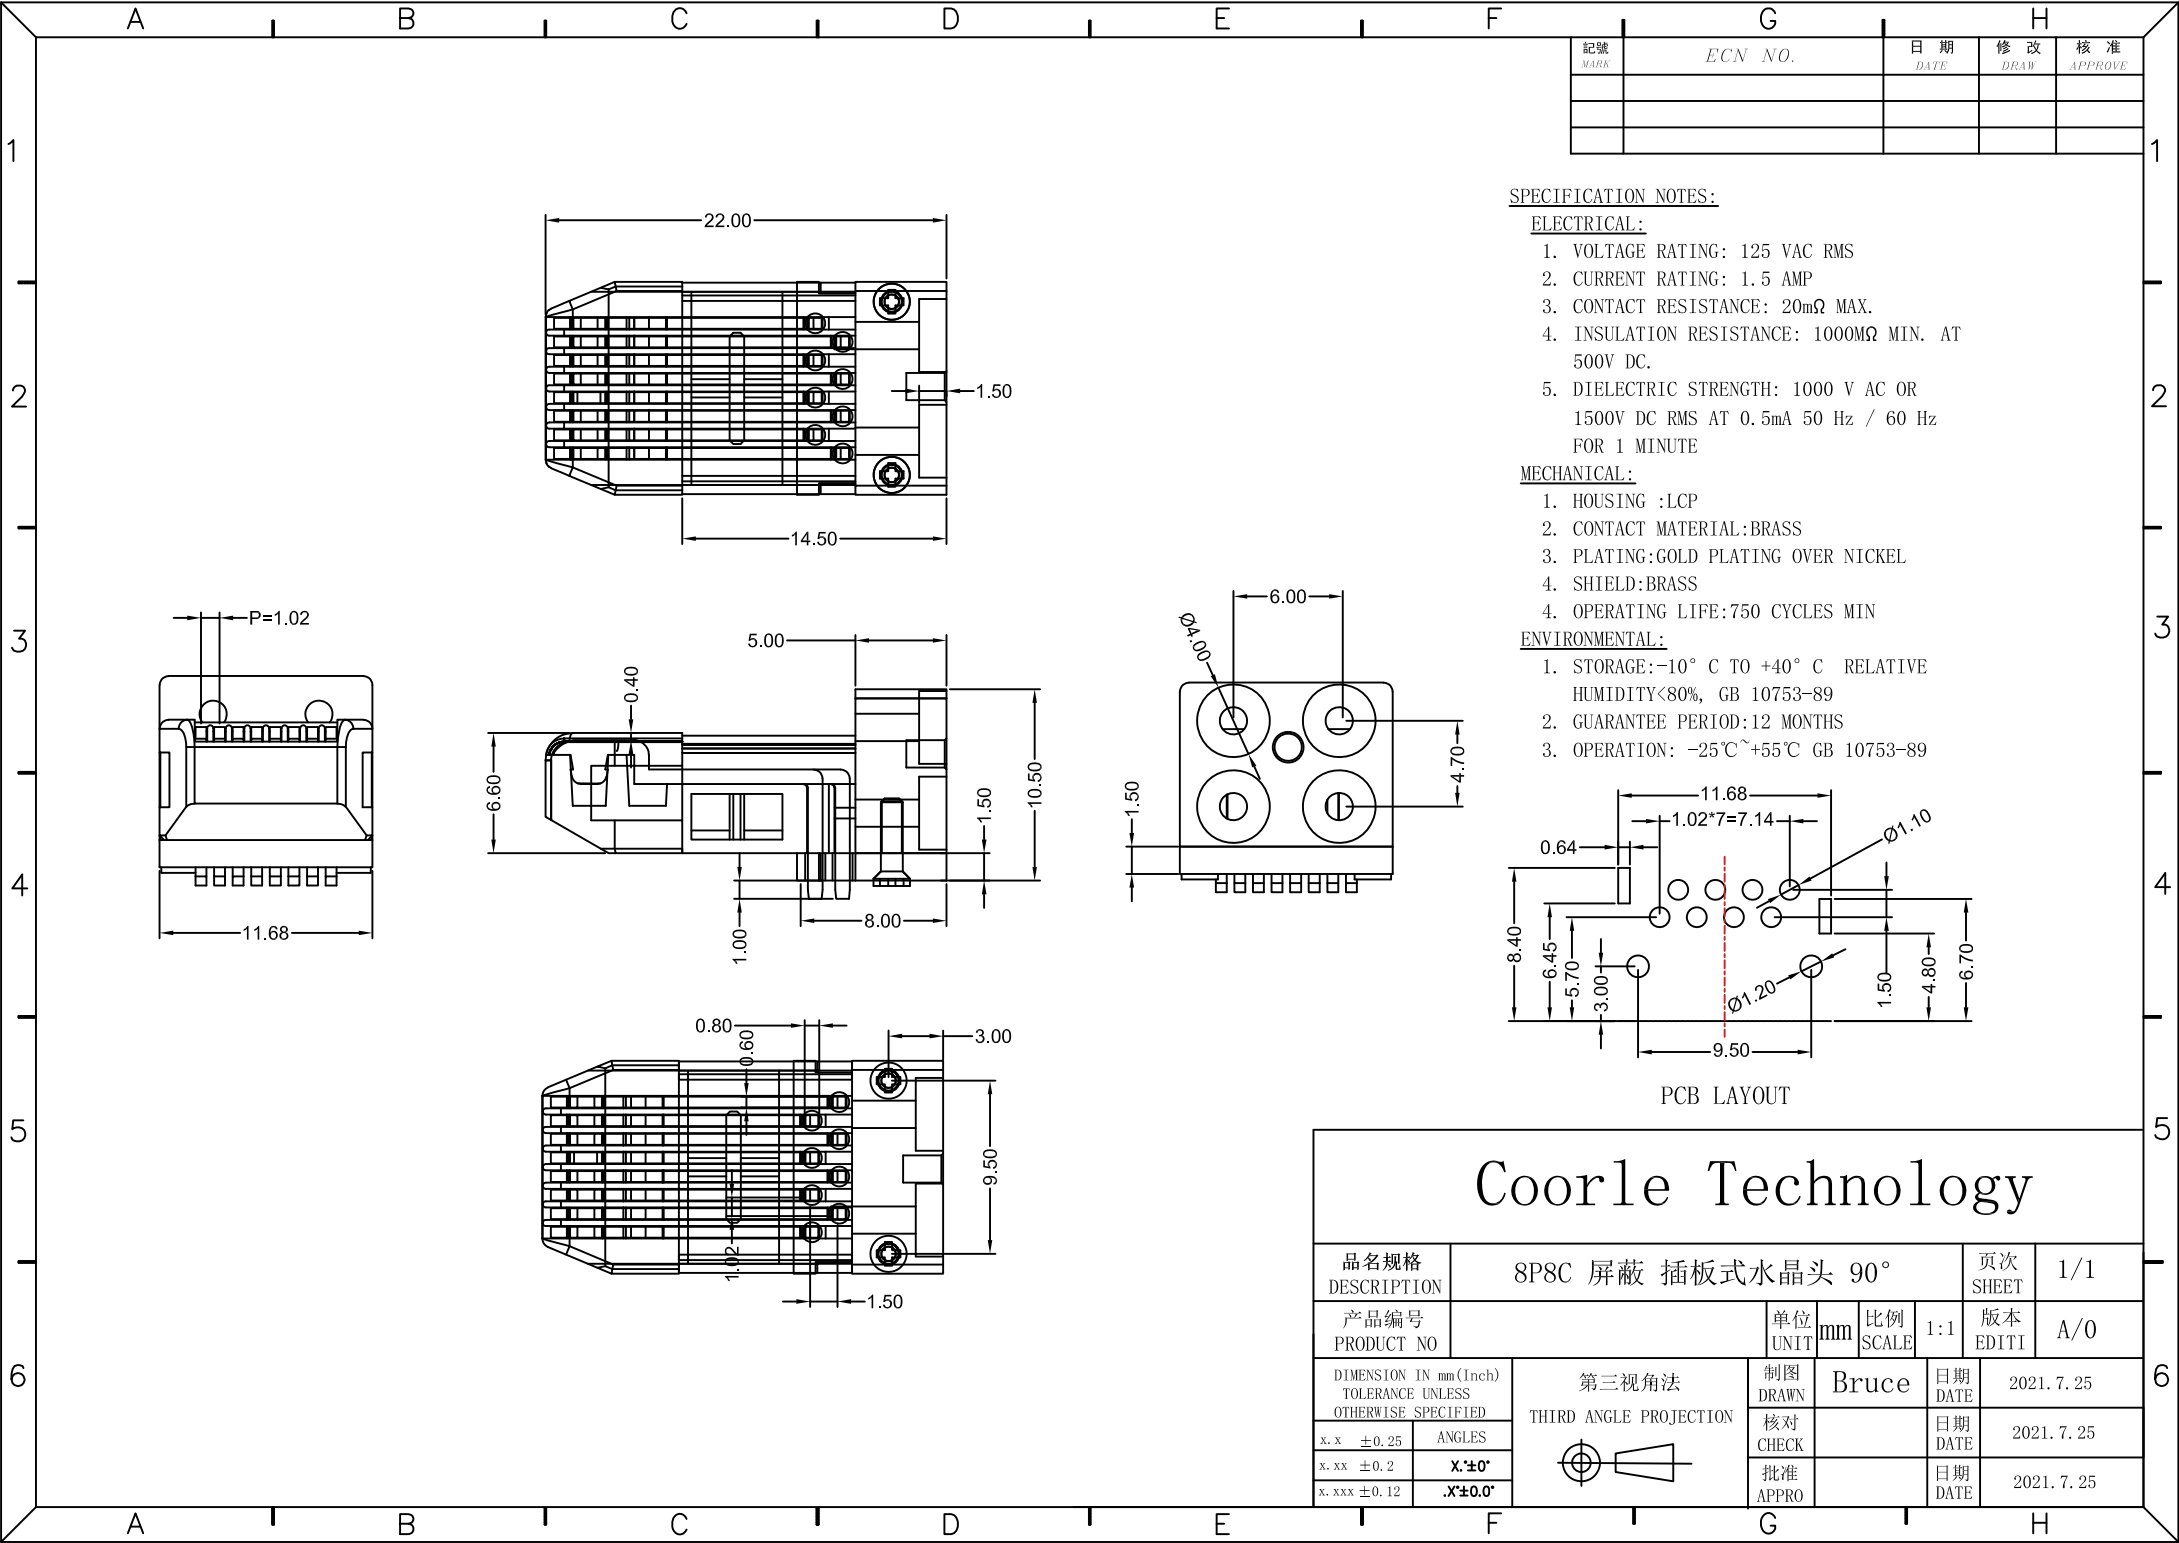


記號 MARK	ECN NO.	日期 DATE	修改 DRAW	核准 APPROVE

- SPECIFICATION NOTES:
- ELECTRICAL:
- VOLTAGE RATING: 125 VAC RMS
 - CURRENT RATING: 1.5 AMP
 - CONTACT RESISTANCE: 20mΩ MAX.
 - INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC.
 - DIELECTRIC STRENGTH: 1000 V AC OR 1500V DC RMS AT 0.5mA 50 Hz / 60 Hz FOR 1 MINUTE

- MECHANICAL:
- HOUSING :LCP
 - CONTACT MATERIAL:BRASS
 - PLATING:GOLD PLATING OVER NICKEL
 - SHIELD:BRASS
 - OPERATING LIFE:750 CYCLES MIN

- ENVIRONMENTAL:
- STORAGE:-10° C TO +40° C RELATIVE HUMIDITY<80%, GB 10753-89
 - GUARANTEE PERIOD:12 MONTHS
 - OPERATION: -25℃~+55℃ GB 10753-89

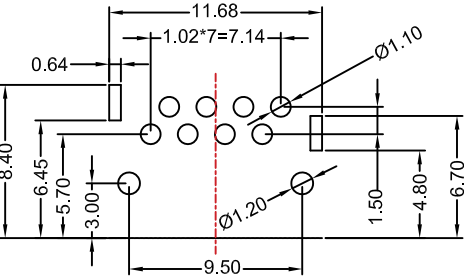

PCB LAYOUT

Coorle Technology

品名规格 DESCRIPTION		8P8C 屏蔽 插板式水晶头 90°					页次 SHEET	1/1
产品编号 PRODUCT NO			单位 UNIT	mm	比例 SCALE	1:1	版本 EDITI	A/0
DIMENSION IN mm(Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		第三视角法 THIRD ANGLE PROJECTION 	制图 DRAWN	Bruce		日期 DATE	2021. 7. 25	
x. x ±0.25	ANGLES		核对 CHECK			日期 DATE	2021. 7. 25	
x. xx ±0.2	X.±0°		批准 APPRO			日期 DATE	2021. 7. 25	
x. xxx ±0.12	.X'±0.0°							