



REV.	ECN NO.	DATE
1.00	NEW VER.	2022.06.14

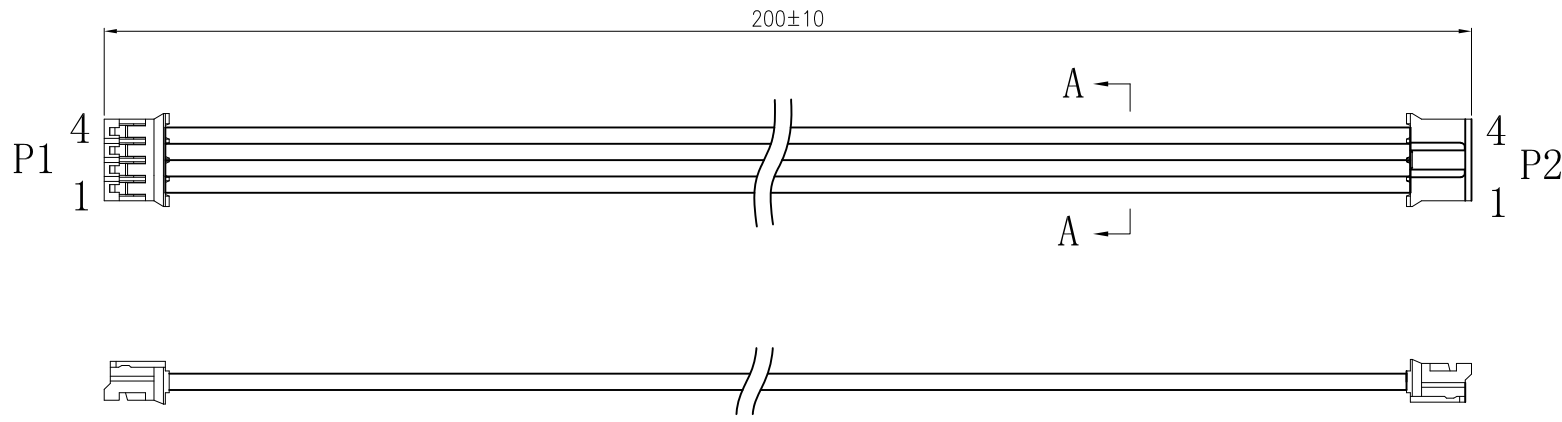

CONTACT		
P1	COLOR	P2
4	Black	4
3	Black	3
2	Black	2
1	Black	1

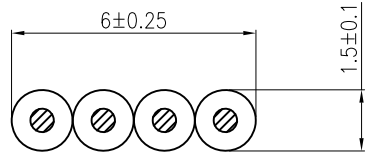

SECTION: A-A  
SCALE 4:1

**SPECIFICATION**

MATERIAL:

- 1. PH2.0 Plug: 4P WHITE
- 2. Cable: 26AWG (30/0.08T)\*4F SILICON RUBBER BLACK

ELECTRICAL:

- 1 Open, Short, Miswire 100% test;
- 2 Insulation resistance: 20MΩmin/DC 500V;
- 3 Contact resistance: 5Ωmax;
- 4. Cable TL Plug Tensile Strength:7.7Kg Min;

ENVIRONMENTAL:

- 1.Operation temperature: -10℃~+60℃;
- 2.Storage temperature: -10℃~+40℃  
relative humidity <80%.

RoHS Compliant

Coorle Technology				TOLERANCES		MATERIAL: N/A		Designed:		NAME: CABLE 26AWG*4F PH 4Px2 L=0.2M	
				0~30 ±0.15		FINISH: N/A		Checked:		DWG NO:	
FIRST ANGLE PROJECTION		A4	SCALE	UNIT	CUSTOMER:	SHEET 1 OF 1		Approved:		PART NO:	
SIZE		1:1	mm	MODEL NO:							