

1

2

3

4

5

6

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A0		NEW	WANG	2024-01-30

A

B

C




D

A

B

C

D




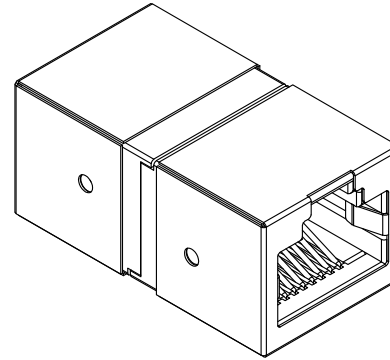
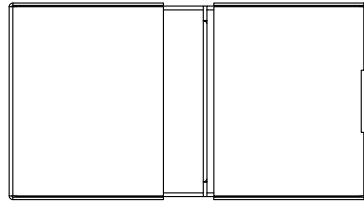
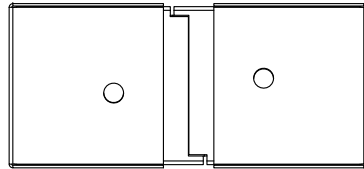



电气特性:

1. 工作电压: 125 VAC
2. 工作电流: 1.5 A
3. 工作温度: -55℃~125℃
4. 绝缘电阻: 1000 MΩ MIN.@500 VDC
5. 耐压强度: 700V(50Hz AC, 针与针间);
1000V (50Hz AC, 针与外壳间)

材料要求

1. 塑壳材质: 高温料黑色 , UL94V-0 ;
2. 金针材质: 磷青铜, 直径0.46mm 镀金;
3. 外壳材质: 不锈钢, 厚度0.20mm ;

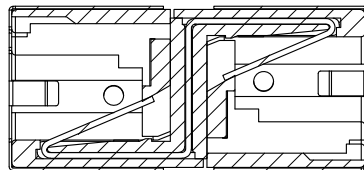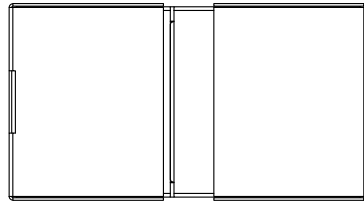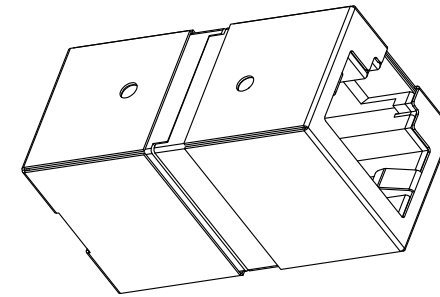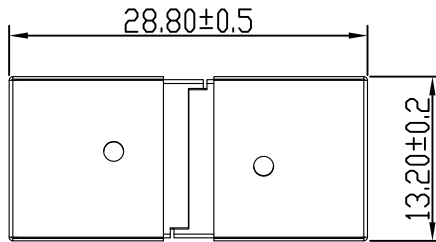

设计DR. Tom Y 2024-01-30	核准APPD. WANG WEI 2024-01-30	公差.TOLERANCE .XXX ±0.15 .XX ±0.25 .X ±0.38 X ±0.50 ANG ±3°		品名 ARTICLE RJ45-Z1 长28.8mm YW121			
				图号 DWG NO. 5213-15-Z1			
				单位UNIT mm	比例SCALE 1:1	页数SHEET 1/1	版本REV. A0

1

2

3

4

5

6