



REV.	ECN NO.	DATE
1.00	NEW VER.	2024.12.14

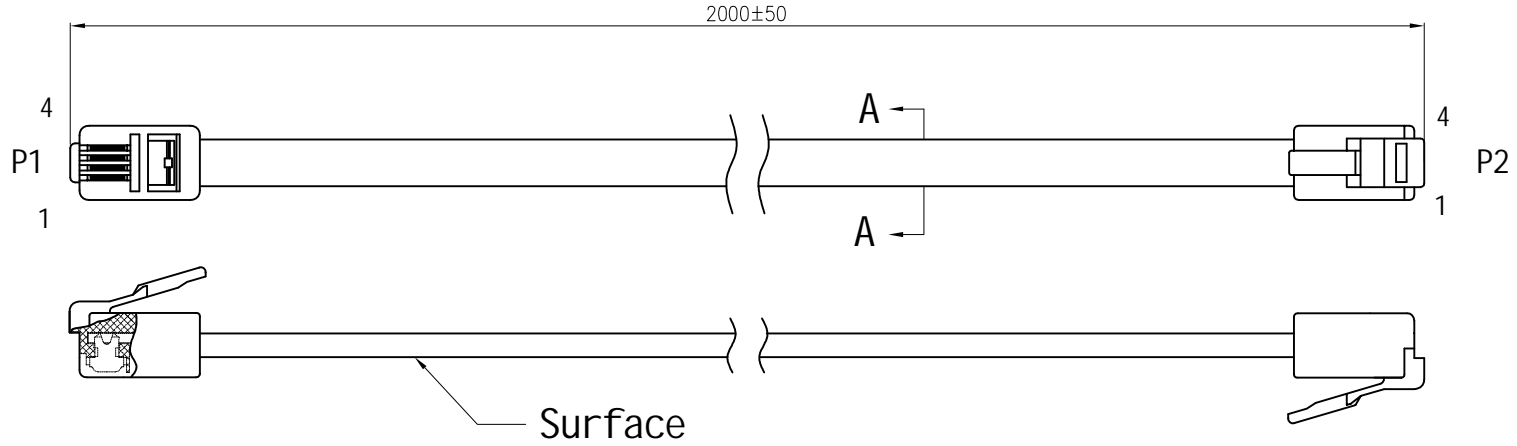

CONTACT		
P1	COLOR	P2
4	Yellow	4
3	Green	3
2	Red	2
1	Black	1

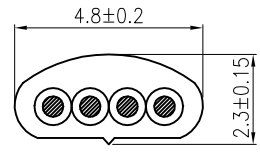

SECTION: A-A  
SCALE 4:1

**SPECIFICATION**

MATERIAL:

1. Modular Plug: 4P4C G/F -F PC
2. Cable: UL20251 28AWG(7/0.12BC)\*4C PVC Silver-gray  
MARKING: E484431 兎 AWM 20251 FT-2 60°C 150V RICHWOOD

ELECTRICAL:

1. Open, Short, Miswire 100% test;
2. Insulation resistance: 20M Ω min/DC 500V;
3. Contact resistance: 5 Ω max;
4. Cable TL Plug Tensile Strength: 7.7Kg Min;

ENVIRONMENTAL:

1. Operation temperature: -10°C~+60°C;
2. Storage temperature: -10°C~+40°C  
relative humidity <80%.

RoHS Compliant

Coorle Technology

TOLERANCES  
0~30 ±0.15  
30~ ±0.25  
ANGLES: ±1°

MATERIAL: N/A

Designed:

NAME: TEL CABLE 28AWG \*4C L=2000MM

FINISH: N/A


Checked:

DWG NO:

SHEET 1 OF 1

Approved:

PART NO:



A4  
SIZE

SCALE  
1:1

UNIT  
mm

CUSTOMER:  
MODEL NO: