


記號 MARK	ECN NO.	日期 DATE	修改 DRAW	核准 APPROVE
1	物料編碼更改	2022/4/15	丁敏	

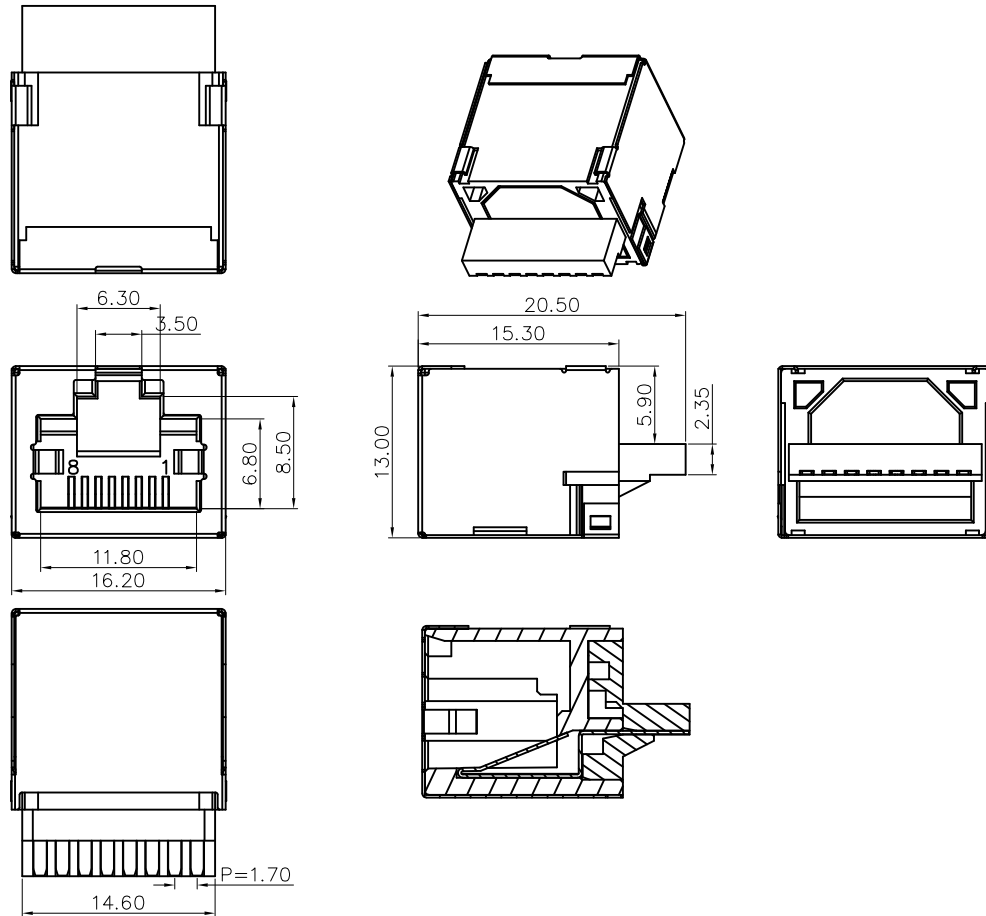

SPECIFICATION NOTES:

ELECTRICAL:

- 1.VOLTAGE RATING: 125 VAC RMS
- 2.CURRENT RATING: 1.5 AMP
- 3.CONTACT RESISTANCE: 20mΩ MAX.
- 4.INSULATION RESISTANCE: 1000MΩ MIN. AT500V DC.
- 5.DIELECTRIC STRENGTH: 1000 V AC OR 1500V DC RMS AT 0.5mA 50 Hz / 60 Hz FOR 1MINUTE

MECHANICAL:

- 1.HOUSING:PBT+25%GF, HB
- 2.CONTACT:PHOSPHOR BRONZE T=0.25MM
- 3.PLATING:GOLD PLATING G/F AT CONTACT AREA, MATTE TIN AT TAIL 80U MIN., NICKEL 30U MIN. OVER ALL.
- 4.SHELL:BRASS T=0.20
- 5.OPERATING LIFE:750 CYCLES MIN.
- 6.MATING/UNMATING FORCE: 30N/3.06KGf MAX.
- 7.RETENTION STRENGTH:50N OR 30N MIN.FOR 60S±5S

ENVIRONMENTAL:

- 1.STORAGE:-40°C TO +85°C RELATIVE HUMIDITY<80%
- 2.GUARANTEE PERIOD:12 MONTHS
- 3.OPERATION: -40°C TO +85°C
- 4.MANUAL SOLDERING PARAMETERS:24H IR TEMPERATURE: 260±5°C 5~10 SECONDS.

Coorle Technology

品名规格 DESCRIPTION	RJ45 8P8C 方形屏蔽母座 A款				页次 SHEET	1/1			
产品编号 PRODUCT NO				单位 UNIT	mm	比例 SCALE	1:1	版本 EDITI	A/0
DIMENSION IN mm(Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		第三视角法 THIRD ANGLE PROJECTION		制图 DRAWN	<i>Jack</i>	日期 DATE	2020. 9. 7		
x . x ±0. 2	ANGLES			核对 CHECK	<i>Ting</i>	日期 DATE	2020. 9. 7		
x . xx ±0. 10	X.±0°			批准 APPRO	<i>Michael</i>	日期 DATE	2022. 4. 15		
x . xxx ±0. 050	.X±0.0°								