


PCB LAYOUT/TOP VIEW

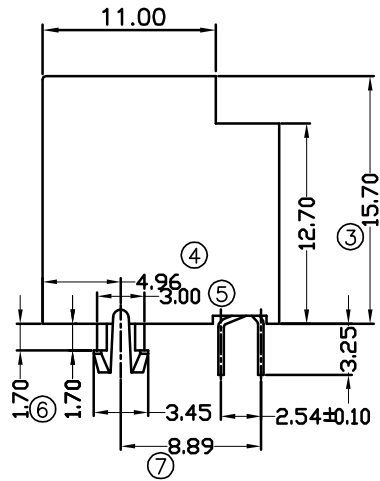

Electrical:

- 1.Voltage Rating: 125 Vac Rms
- 2.Current Rating: 1.5 Amp
- 3.Contact Resistance: 40 Milliohms Max
- 4.Insulation Resistance: 1000 Megohms Min@500 Vdc
- 5.Dielectric Strength: 1000 Vac Rms 60Hz,1Min

Mechanical:

- 1.Operating: 750 Cycles Min

Environmental:

- 1.Storage: -40°C To +85°C
- 2.Opertion: -20°C To +75°C

Mates With Modular Plug Conforming To FCC Part 68,Subpart F

Notes:

MATERIALS

HOUSING: ENGINEERING THERMOPLASTIC FLAMMABILITY UL 94V-0

CONTACTS: PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT
TIN PLANTING OVER NICKEL IN SOLDER AREA

TOLERANCE UNLESS OTHERWISE SPECIFIED		CUSTOMER COPY			Coorle Technology			
LINER	ANGLES	PROJECTION			PROD. TOP ENTRY PCB JACK DESCRIP.		PROD. NUMBER	
0 ± 0.50	± 3'				(6P4C带台阶)		PROD. NUMBER	
.0 ± 0.38								
.00 ± 0.25								
DESIGN	PAUL HUANG	6/15/19	UNIT	SCALE	SIZE	REV.	Http://www.coorle.cn Tel: 0769-81585156 Fax: 0769-81605156	
APPRO.			MM	/	A4	C		

ROHS