


PCB LAYOUT/ TOP VIEW

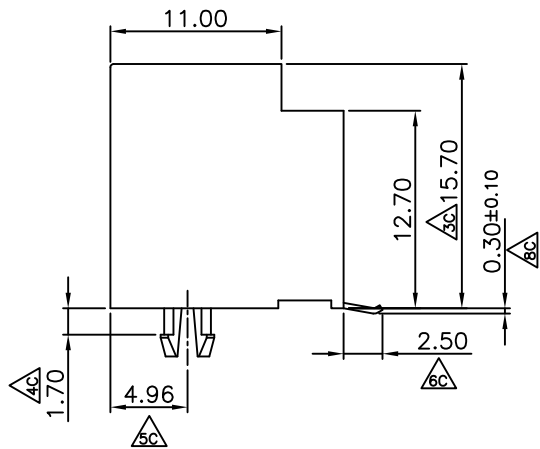

Electrical:

- 1.Voltage Rating: 125 Vac Rms
- 2.Current Rating: 1.5 Amp
- 3.Contact Resistance: 40 Milliohms Max
- 4.Insulation Resistance: 1000 Megohms Min@500 Vdc
- 5.Dielectric Strength: 1000 Vac Rms 60Hz,1Min

Mechanical:

- 1.Operating: 750 Cycles Min

Environmental:

- 1.Storage: -40°C To +85°C
- 2.Opertion: -20°C To +75°C

Mates With Modular Plug Conforming To FCC Part 68,Subpart F


Notes:

MATERIALS

HOUSING: HIGH TEMP THERMOPLASTIC FLAMMABILITY UL 94V-0

CONTACTS: PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT  
TIN PLANTING OVER NICKEL IN SOLDER AREA

TOLERANCE UNLESS OTHERWISE SPECIFIED		CUSTOMER COPY			Coorle Technology Co.,Ltd				
LINER	ANGLES	PROJECTION 			PROD. TOP ENTRY PCB JACK		DESCRIP. (RJ11 6P4C)		
0 ± 0.50	± 3'				PROD. NUMBER		SIZE	REV.	Http://www.coorle.cn
.0 ± 0.38		DESIGN	Wesley Yu	6/23/11	UNIT	SCALE	SIZE	REV.	
.00 ± 0.25		APPRO.			MM	/	A4	B	
ROHS								Tel: 0769-81585156 Fax: 0769-81605156	

A

B

C

D

E

F

A

B

C

D

E

F

1|

2|

3|

4|

5|

6|

1|

2|

3|

4|

5|

6|