


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
AO	INITIAL RELEASE	KEN	19.09.08

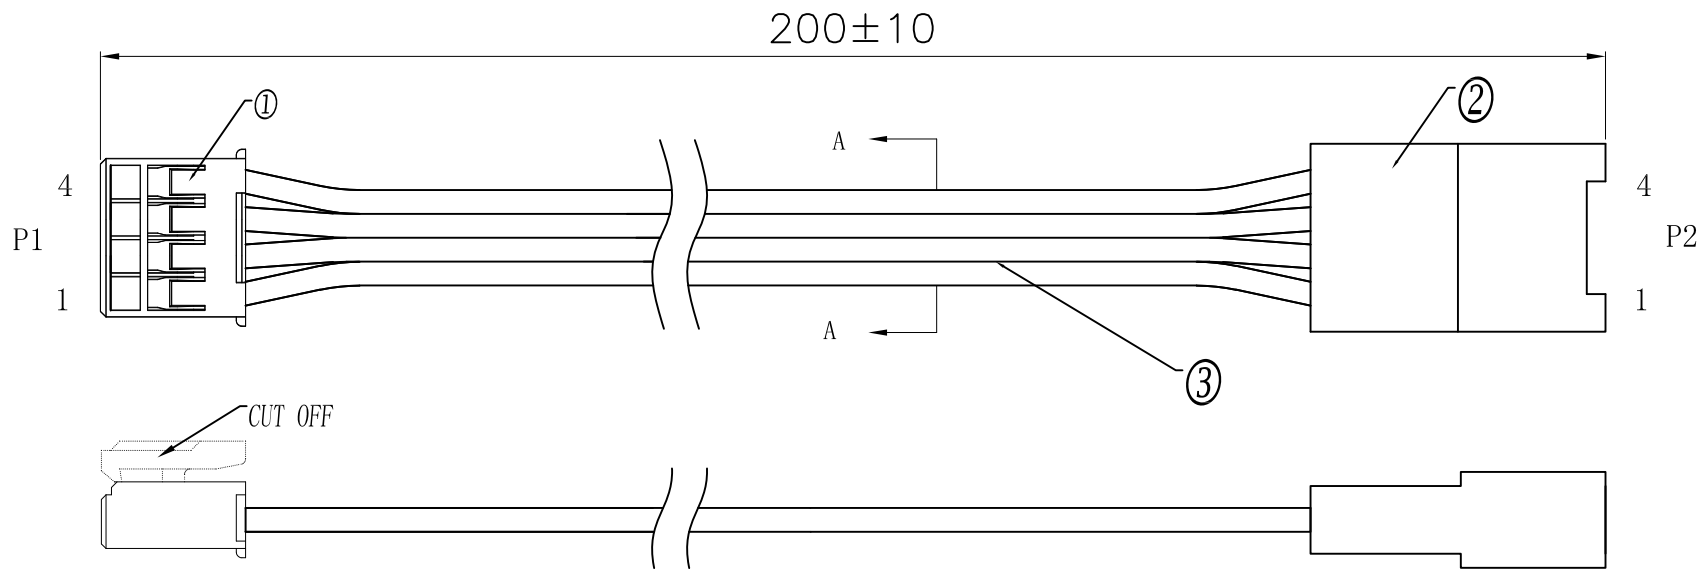

CONTACT		
P1	COLOR	P2
1	WHITE	1
2	WHITE	2
3	WHITE	3
4	WHITE	4

SPECIFICATION

MATERIAL:


1. Plug:HY 2.0 4P4C MALE, COLOR WHITE
2. Plug:HY 2.0 4P4C FEMALE, COLOR WHITE
3. Cable: 24AWG(19/0.12T)*4F, JACKET TPE, COLOR WHITE

ELECTRICAL:

1. Open, Short, Miswire 100% test;
2. Insulation resistance: 20MΩ min/DC 500V;
3. Contact resistance: 5Ω max;
4. Cable TL Plug Tensile Strength:7.7Kg Min;

ENVIRONMENTAL:

1. Operation temperature: -10°C~+60°C;
2. Storage temperature: -10°C~+40°C
relative humidity <80%.

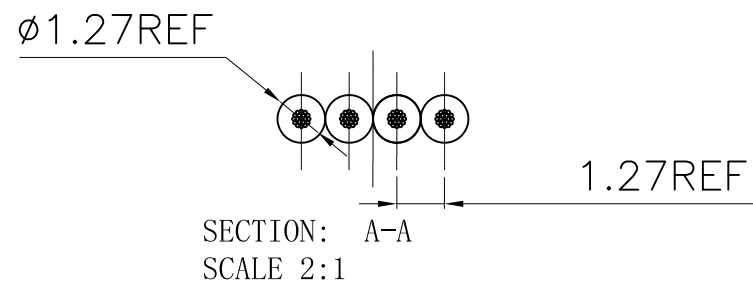

UNLESS OTHERWISE SPECIFIED TOLERANCES		Coorle Technology	
DECIMALS:	ANGLES:	TITLE	HY 2.0 Cable MALE TO FEMALE L=200MM
X :±0.20	X :±3°	DWN	Michael 23.03.31 PART-NO:
X.X :±0.10	X.X :±1°	CHKD	UNIT: mm
X.XX :±0.05		APVD	SHEET:1 OF 1
		SCALE:1/1	
ENGINEERING COPY			