


記號 MARK	ECN NO.	日期 DATE	修改 DRAW	核准 APPROVE

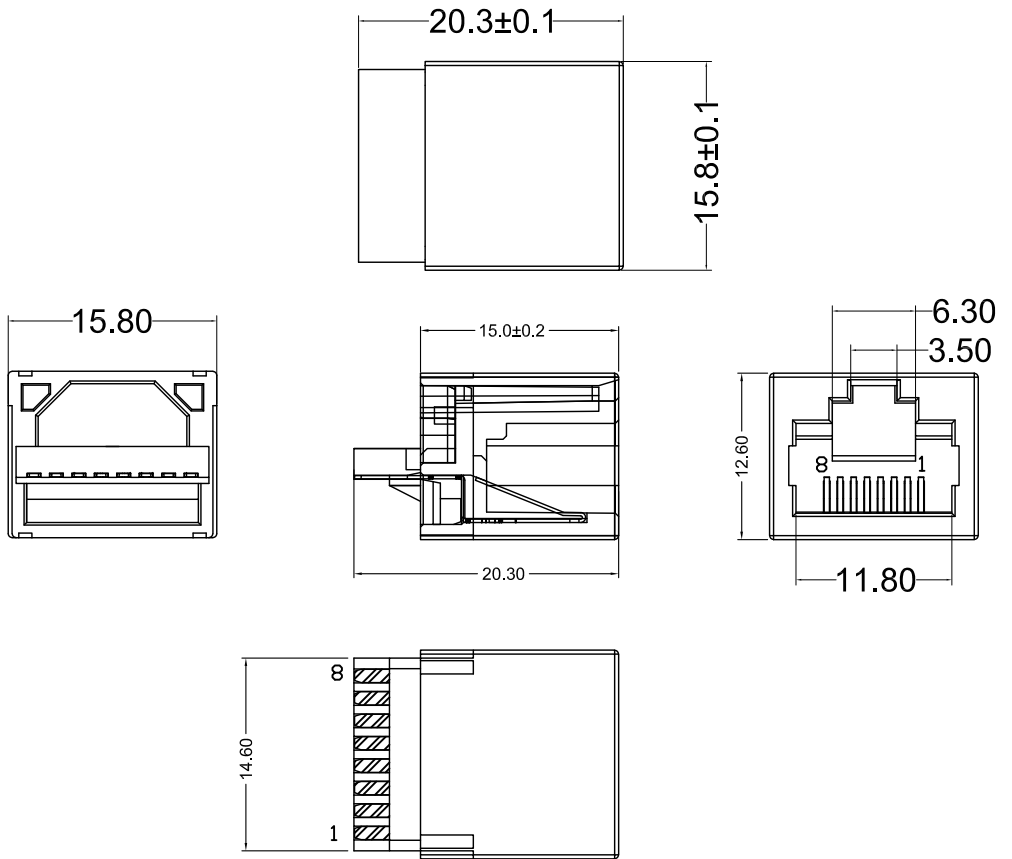

SPECIFICATION NOTES:

ELECTRICAL:


- 1.VOLTAGE RATING: 125 VAC RMS
- 2.CURRENT RATING: 1.5 AMP
- 3.CONTACT RESISTANCE: 20mΩ MAX.
- 4.INSULATION RESISTANCE: 1000MΩ MIN. AT500V DC.
- 5.DIELECTRIC STRENGTH: 1000 V AC OR 1500V DC RMS AT 0.5mA 50 Hz / 60 Hz FOR 1MINUTE

MECHANICAL:

- 1.HOUSING:PBT+25%GF, HB
- 2.CONTACT:PHOSPHOR BRONZE T=0.25MM
- 3.PLATING:GOLD PLATING G/F AT CONTACT AREA, MATTE TIN AT TAIL 80U MIN., NICKEL 30U MIN. OVER ALL.
- 4.OPERATING LIFE:750 CYCLES MIN.
- 5.MATING/UNMATING FORCE: 30N/3.06KGf MAX.
- 6.RETENTION STRENGTH:50N OR 30N MIN.FOR 60S±5S

ENVIRONMENTAL:

- 1.STORAGE:-40°C TO +85°C RELATIVE HUMIDITY<80%
- 2.GUARANTEE PERIOD:12 MONTHS
- 3.OPERATION: -40°C TO +85°C

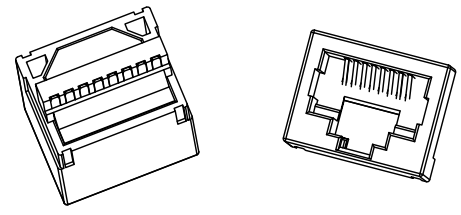

Coorle Technology

品名规格 DESCRIPTION	Modular Jack 8P8C Soldered type	页次 SHEET	1/1
产品编号 PRODUCT NO	单位 UNIT	比例 SCALE	版本 EDITI
	mm	1:1	A/0
DIMENSION IN mm(Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED	第三视角法 THIRD ANGLE PROJECTION	制图 DRAWN	日期 DATE
x.xx ±0.2	核 对 CHECK	Michael	2020. 9. 7
x.xx ±0.10	批 准 APPRO		日期 DATE
x.xxx ±0.050			2020. 9. 7