

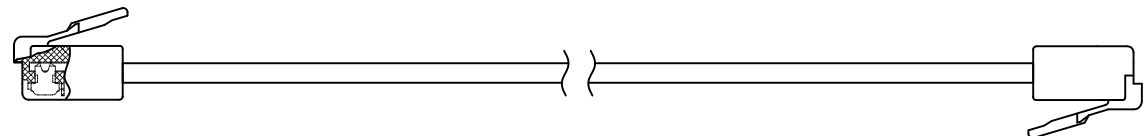


REV.	ECN NO.	DATE
1.00	NEW VER.	2021.08.12

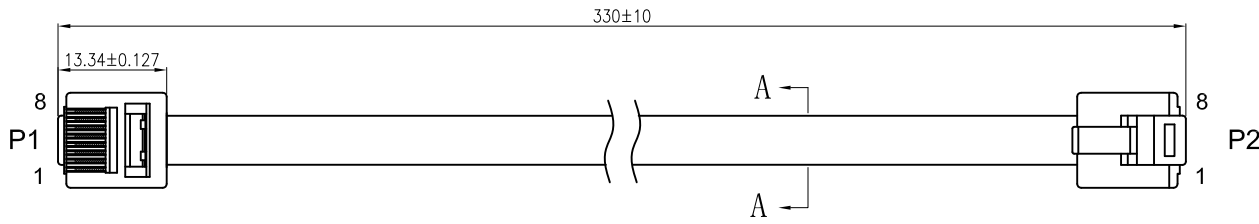

CONTACT

P1	Color	P2
8	Brown	8
7	White	7
6	Blue	6
5	White	5
4	Green	4
3	White	3
2	Orange	2
1	White	1

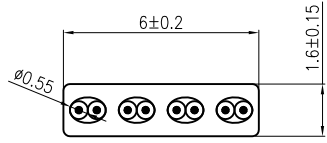

SECTION: A-A
SCALE 4:1

SPECIFICATION

MATERIAL:

- 1. Modular Plug: 8P8C Short Body, PC Clean;
- 2. Cable: CAT.6 Flat Cable 32WG*4Pair PVC White;

ELECTRICAL:

- 1. Open, Short, Miswire 100% test;
- 2. Insulation resistance: 20MΩmin/DC 500V;
- 3. Contact resistance: 5Ωmax;
- 4. Cable TL Plug Tensile Strength: 7.7Kg Min;

ENVIRONMENTAL:

- 1. Operation temperature: -10°C~+60°C;
- 2. Storage temperature: -10°C~+40°C
relative humidity <80%.

RoHS Compliant

Coorle Technology

TOLERANCES

- 0~30 ±0.15
- 30~ ±0.25
- ANGLES: ±1°

MATERIAL: SEE ABOVE

FINISH: N/A

SHEET 1 OF 1

Designed:

Checked:

Approved:

NAME: Flat Cable L=330mm

DWG NO:

PART NO:



A4
SIZE

SCALE
1:1

UNIT
mm

CUSTOMER:
MODEL NO: