


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
AO	INITIAL RELEASE	KEN	22.01.12

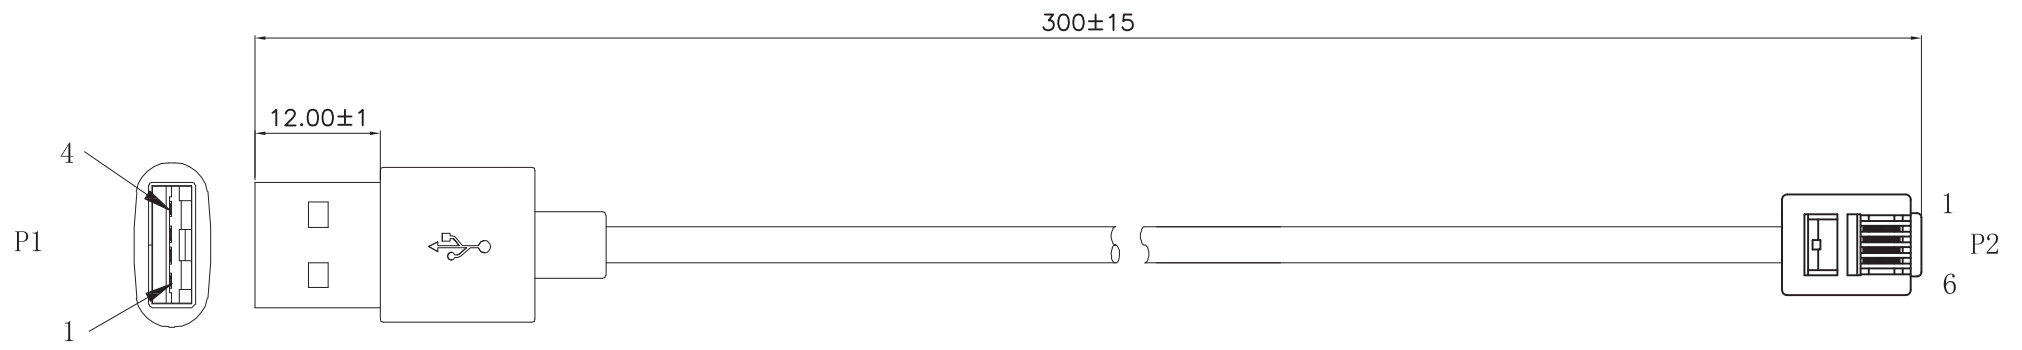

Contact			
Function	P1	Color	P2
VUBS+	1	RED	1
/	/	/	2
Data-	2	WHITE	3
Data+	3	GREEN	4
/	/	/	5
GND	4	BLACK	6

**SPECIFICATION**

MATERIAL:

1. Modular Plug: 6P4C PC G/F
2. Cable: 28AWG\*4C TPE White
3. USB: A TYPE Male

ELECTRICAL:

1. Open, Short, Miswire 100% test;
2. Insulation resistance: 20MΩ min/DC 500V;
3. Contact resistance: 5Ω max;
4. Cable TL Plug Tensile Strength: 7.7Kg Min;

ENVIRONMENTAL:

1. Operation temperature: -10°C~+60°C;
2. Storage temperature: -10°C~+40°C  
relative humidity <80%.

UNLESS OTHERWISE SPECIFIED TOLERANCES		Coorle Technology	
DECIMALS:	ANGLES:	TITLE	USB A Male To Modular Plug 6P4C L=300MM
X :±0.20	X :±3°	DWN	Michael 22.01.12 <b>PART-NO:</b>
X.X :±0.10	X.X :±1°	CHKD	UNIT: mm
X.XX :±0.05		APVD	SHEET:1 OF 1 SCALE:1/1
<b>ENGINEERING COPY</b>			