





1

2

3

4

REV.	CHANGE CONTENT	DATE
X3	UPDATE DRAWING FOR CHANGING APPEARANCE	20141017

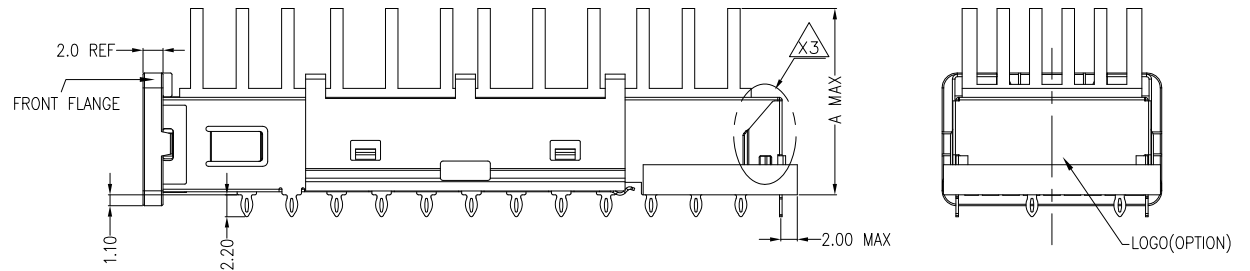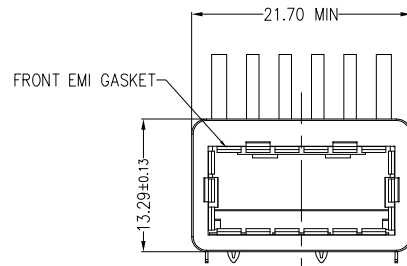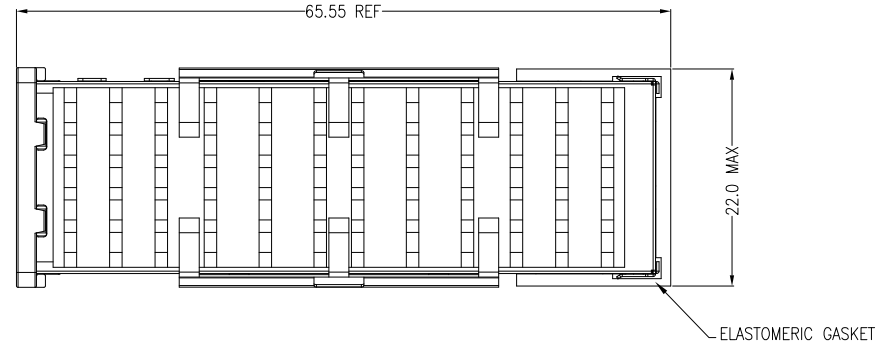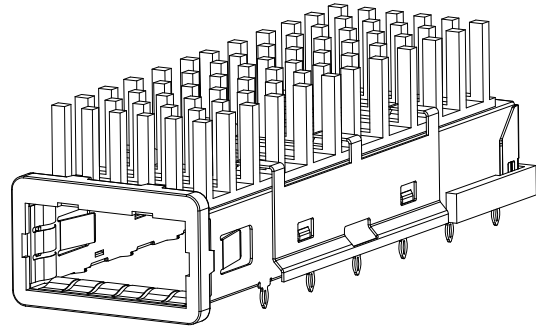

NOTE:
MATERIAL:

1. XFP CAGE: COPPER ALLOY C7701 T=0.25mm.
2. ELASTOMERIC GASKET: CONDUCTIVE RUBBER.
3. XFP CAGE REAR EMI GASKET: CONDUCTIVE FOAM.
4. FRONT FLANGE: ZINC ALLOY.
5. FRONT EMI GASKET: COPPER ALLOY.
6. XFP HEAT SINK CLIP: COPPER ALLOY C7701 T=0.25mm.
7. XFP HEAT SINK: ALUMINUM, ANODIZED BLACK

PLATED:

1. FRONT FLANGE : TIN OVER NICKEL AND COPPER FLASH
2. FRONT EMI GASKET: 1.27 MICROMETERS MINIMUM MATTE TIN OVER 1.27 MICROMETERS MINIMUM NICKEL FOR ALL.

MECHANICAL REQUIREMENT:

1. DURABILITY: 100 CYCLES MIN.
2. INSERTION AND EXTRACTION FORCE: 40N MAX & 30N MAX

RoHS Compliant

X2	10725111W006	18.65	XFP 1*1 CAGE WITH HEATSINK	
X2	10725111W007	15.15	XFP 1*1 CAGE WITH HEATSINK	
X2	10725111W008	12.85	XFP 1*1 CAGE WITH HEATSINK	
	10725111W003	18.65	XFP 1*1 CAGE WITH HEATSINK	
	10725111W004	15.15	XFP 1*1 CAGE WITH HEATSINK	
	10725111W005	12.85	XFP 1*1 CAGE WITH HEATSINK	
	PART NUMBER	DIMENSION A	DESCRIPTION	

© 库乐科技

TOLERANCES

.0 ± 0.25
.00 ± 0.20
.000 ± 0.10
ANGLES ± 0.5

Material: SEE NOTE

Designed: 王帅

NAME: XFP 1*1 CAGE WITH HEATSINK

Finish: SEE NOTE

Checked:

DWG NO: ESFP13091101-C

REV.

SHEET 1 OF 2

Approved:

PART NO: SEE TABLE

X3

1

2

3

4





A4
SIZE

SCALE
1:1



UNIT
mm

CUSTOMER: N/A
MODEL NO: N/A

REV.	CHANGE CONTENT	DATE
X3	UPDATE DRAWING FOR CHANGING APPEARANCE	20141017

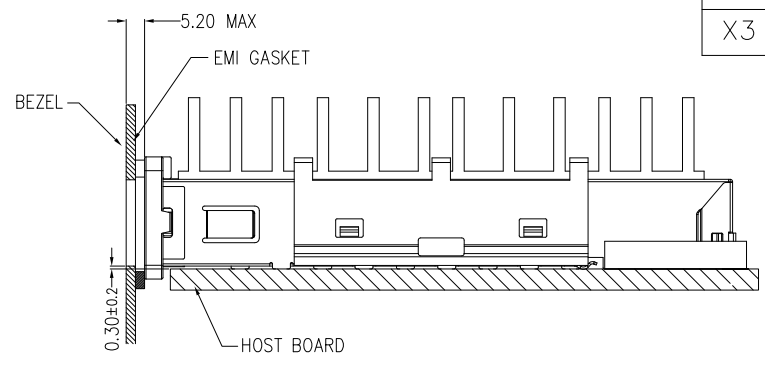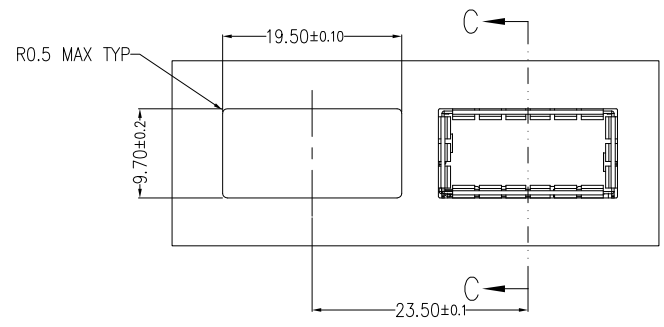

SECTION C-C

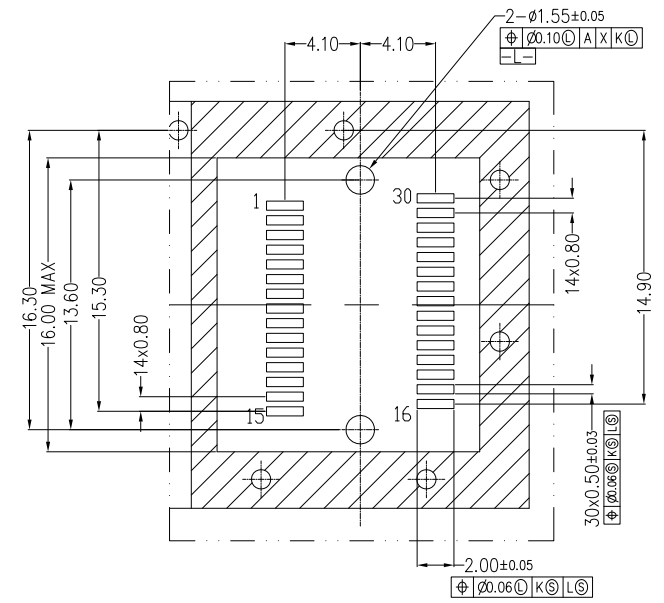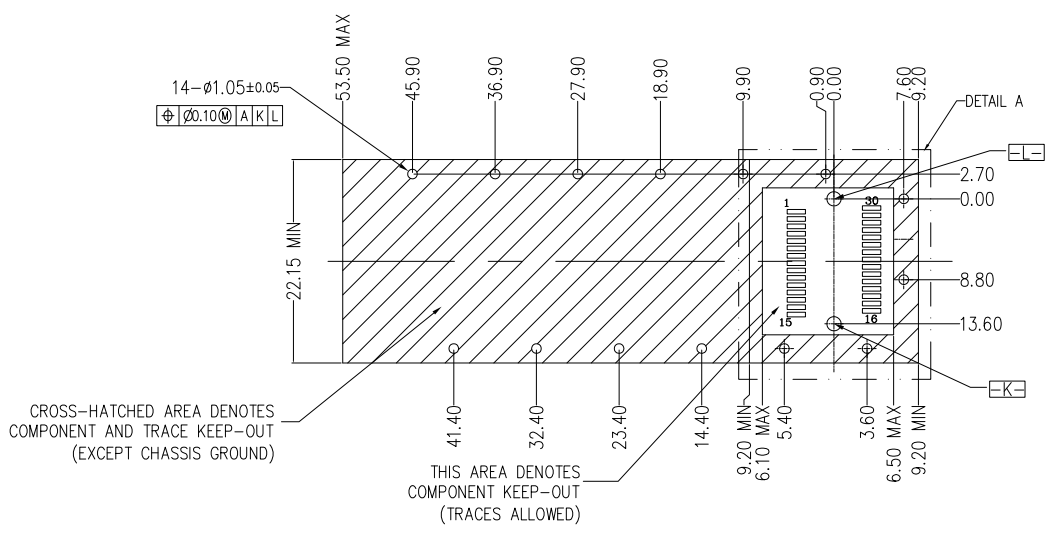

DETAIL: A
SCALE: 2/1

RoHS Compliant

库乐科技

TOLERANCES
.0 ± 0.25
.00 ± 0.20
.000 ± 0.10
ANGLES ± 0.5

Material: SEE NOTE
Finish: SEE NOTE
SHEET 2 OF 2

Designed: 王帅
Checked:
Approved:

NAME: XFP 1*1 CAGE WITH HEATSINK
DWG NO: ESFP13091101-C
PART NO: SEE TABLE

REV.
X3



A4
SIZE

SCALE
1:1

UNIT
mm

CUSTOMER: N/A
MODEL NO: N/A